



Città di Segrate

CONCORSO PUBBLICO, PER SOLI ESAMI, PER LA COPERTURA DI UNA POSIZIONE DI DIRIGENTE - PROFILO TECNICO, A TEMPO PIENO ED INDETERMINATO

VERBALE n. 4 DELLE OPERAZIONI SVOLTE DALLA COMMISSIONE GIUDICATRICE

Il giorno 17 aprile 2023, alle ore 08:00 presso la sede municipale di Segrate – Via 1° maggio snc - si è riunita la Commissione giudicatrice del concorso pubblico in oggetto indicato, nominata con atto dirigenziale n. 146 del 16.02.2023 e integrata con disposizione dirigenziale n. 59 del 7/03/2023 nelle persone dei signori:

Avv. Mario Vanni	Dirigente Ente Locale	Presidente
Arch. Simona Collarini	Dirigente Ente Locale	Commissario
Avv. Antonio Sebastiano Purcaro	Dirigente Ente Locale	Commissario

Le funzioni di Segretario verbalizzante sono svolte dal Dott. Cesare Benazzi – Specialista Amministrativo Contabile presso la Sezione Gestione Risorse Umane.

Partecipa inoltre la Dott.ssa Nadia Cristofoli, esperta in psicologia del lavoro e reclutamento del personale nominata con disposizione dirigenziale n. 59 del 07/03/2023 in qualità di componente aggiuntivo esterno per la valutazione del profilo attitudinale e motivazionale dei candidati.

LA COMMISSIONE

Constatata la regolarità della propria costituzione, sulla base del programma d'esame previsto dal bando, procede alla formulazione di n. 20 domande (pari a 4 quesiti per ogni concorrente, maggiorati di 4 quesiti di riserva) inerenti alle materie d'esame compresa la prova informatica (1 quesito a concorrente). I quesiti vengono stampati, ritagliati in strisce, ripiegati ed inseriti in 4 contenitori dai quali i candidati estrarranno le domande.

Viene, inoltre, selezionato un testo di carattere tecnico/scientifico per l'accertamento della conoscenza della lingua inglese, che si allega al presente verbale quale parte integrante.

I candidati sono stati convocati a decorrere dalle ore 9.30. Alle ore 9.50 risultano presenti e identificati tutti e 5 i candidati ammessi alla prova orale con il seguente codice identificativo di seguito riportato:

Numero Progressivo	Codice candidato
1	467892
2	467295
3	467240
4	467613
5	467912

I colloqui si svolgeranno in seduta pubblica secondo l'ordine alfabetico del cognome dei candidati ammessi, facendo estrarre dai candidati stessi la lettera alfabetica d'inizio.

Alle ore 10:00 la Commissione fa accedere i candidati nell'area concorsuale situata al terzo piano del Municipio ove avranno luogo i colloqui.

Il Presidente della Commissione illustra le modalità di svolgimento della prova orale e della prova di lingua inglese secondo i criteri stabiliti in precedenza e riportati nel verbale n. 1.

Il Presidente invita uno dei candidati ad avvicinarsi ai membri della Commissione per procedere con l'estrazione a sorte della lettera alfabetica al fine di individuare l'iniziale del cognome del candidato/a che inizierà la prova orale. Si avvicina la candidata 467912 che estrae la lettera N, quindi il primo candidato che sarà esaminato dalla Commissione sarà il candidato 467613.

Alle ore 10:10 ha inizio la prova con il candidato 467613 il quale estrae le seguenti domande:

1. *Le forme di collaborazione tra enti locali.*
2. *La sicurezza nei lavori pubblici.*
3. *La scala metropolitana e i territori di cintura.*
4. (Informatica) *Confidenzialità, integrità e disponibilità dei dati.*

Domanda relativa al profilo attitudinale e motivazionale: *Mi potrebbe raccontare – se vi è stata – una situazione di conflitto che ha avuto con un collega o con un suo collaboratore? Qual era il motivo del disaccordo? Cosa ha fatto per risolvere la situazione e quale accordo è stato preso?*

La candidata 467912 estrae le seguenti domande:

1. *Gli interventi diretti e i temi del paesaggio urbano.*
2. *La partecipazione al procedimento amministrativo.*
3. *Il soccorso istruttorio.*
4. (Informatica) *L'interoperabilità tra i sistemi informativi delle Pubbliche Amministrazioni.*

Domanda relativa al profilo attitudinale e motivazionale: *Mi racconta cortesemente un episodio in cui ha dovuto prendere una decisione in una situazione incerta: qual era il suo obiettivo? Quali azioni ha messo in atto e con quale risultato?*

Il candidato 467892 estrae le seguenti domande:

1. *Il principio della programmazione nella gestione degli enti locali.*
2. *Le regole per le opere finanziate con i fondi PNRR.*
3. *La casa accessibile.*
4. (Informatica) *La validità e l'efficacia probatoria dei documenti informatici (art. 20 D. Lgs. 82/2005).*

Domanda relativa al profilo attitudinale e motivazionale: *Mi potrebbe descrivere una situazione in cui si è trovato in una situazione stressante nel contesto lavorativo: cosa ha fatto per gestirla? Se tornasse indietro cambierebbe qualcosa?*

La candidata 467295 estrae le seguenti domande:

1. *Le convenzioni urbanistiche e le diverse modalità d'intervento.*
2. *Il subappalto.*
3. *La semplificazione amministrativa.*
4. (Informatica) *La digitalizzazione dei procedimenti amministrativi.*

Domanda relativa al profilo attitudinale e motivazionale: *Mi potrebbe raccontare la situazione più complessa nella quale ha dovuto delegare gli incarichi distribuendoli tra i suoi collaboratori: come ha proceduto? Come hanno reagito i suoi collaboratori?*

Il candidato 467240 estrae le seguenti domande:

1. *Le forme del partenariato pubblico privato.*
2. *Rigenerazione urbana e equilibrio sociale.*
3. *Gli affidamenti in house.*
4. (Informatica) *Il Sistema informativo territoriale.*

Domanda relativa al profilo attitudinale e motivazionale: *Ha mai vissuto una situazione in cui è riuscito a portare a termine il compito affidato anche in presenza di elementi che hanno reso difficile il raggiungimento dell'obiettivo? Che azioni ha messo in atto e che risultato ha raggiunto?*

Il candidato estrae inoltre le domande di riserva che risultano essere:

1. *Il responsabile unico del procedimento.*
2. *La conferenza dei servizi.*
3. *La sostenibilità ambientale nella trasformazione della città esistente.*
4. (Informatica) *La conservazione sostitutiva dei documenti.*

Essendo esaurita la prova d'esame, il Presidente invita i candidati ad uscire dall'aula. Successivamente la commissione la quale è stata costantemente presente in aula durante lo svolgimento di tutte le prove orali, procede alla valutazione ed attribuzione del punteggio della prova orale a ciascun candidato tenendo complessivamente conto dei criteri di valutazione di cui al verbale n. 1 e altresì del giudizio del componente aggiunto per la valutazione dei profili attitudinali e motivazionali.

Sulla base del colloquio effettuato, accertata la conoscenza della parte informatica, della lingua inglese, tenuto conto del profilo attitudinale e motivazionale dei candidati, dopo consultazione e con valutazione collegiale unanime, la Commissione sentito inoltre il parere senza diritto di voto della Dott.ssa Cristofoli per quanto riguarda la sola valutazione delle competenze manageriali (*soft skills*) attribuisce i seguenti punteggi:

Codice candidato	Voto prova orale
467613	23
467912	20
467892	20
467295	27
467240	24

La commissione procede, infine, a formulare e ad approvare, per quanto di competenza, la graduatoria finale di merito, come di seguito riportata:

N. Graduatoria	Identificativo	Punteggio prova scritta	Punteggio prova orale	Punteggio finale	Esito
1	467295	21	27	24,00	Idoneo
2	467613	23	23	23,00	Idoneo
3	467240	21	24	22,50	Idoneo

Essendo esaurite le operazioni concorsuali, il Presidente della commissione autorizza il Segretario della medesima alla pubblicazione dell'esito, in forma anonima, e lo incarica altresì di trasmettere i verbali del concorso al competente dirigente per la prescritta approvazione.

La seduta è tolta alle ore 15.00.

Il presente verbale formato da n. 4 (quattro) pagine è letto, confermato e sottoscritto

IL PRESIDENTE
Avv. Mario Vanni

IL SEGRETARIO
Dott. Cesare Benazzi

I COMMISSARI

Arch. Simona Collarini

Avv. Antonio Sebastiano
Purcaro

(firma digitale – art. 24 del D. Lgs. n. 82/2005)

Allegato testo accertamento conoscenza lingua inglese.



Information modelling for urban building energy simulation—A taxonomic review

Avichal Malhotra^a, Julian Bischof^{b,c}, Alexandru Nichersu^d, Karl-Heinz Häfele^d, Johannes Exenberger^e, Divyanshu Sood^f, James Allan^g, Jérôme Frisch^a, Christoph van Treeck^a, James O'Donnell^f, Gerald Schweiger^{e,*}

^a Institute of Energy Efficiency and Sustainable Building (E3D), RWTH Aachen University, Aachen, Germany

^b Institute for Housing and Environment (Institut für Wohnen und Umwelt (IWU)) - Research Institute of the State of Hesse and the City of Darmstadt, Darmstadt, Germany

^c Dublin Energy Lab and School of Civil and Structural Engineering, Technological University Dublin, Dublin, Ireland

^d Institute for Automation and Applied Informatics, Karlsruhe Institute of Technology, Hermann-von-Helmholtz-Platz 1, 76344 Eggenstein-Leopoldshafen, Germany

^e Institute of Software Technology, Graz University of Technology, Graz, Austria

^f School of Mechanical & Materials Engineering and UCD Energy Institute, University College Dublin, Dublin, Ireland

^g Urban Energy Systems Laboratory, Swiss Federal Laboratories for Materials Science and Technology, Empa, Überland Str. 129, 8600 Dübendorf, Switzerland

ARTICLE INFO

Keywords:

Taxonomic review
Urban building energy modelling
Urban scale physics-based thermal simulation
Interoperability
Energy simulation tools
Reproducibility

ABSTRACT

Climate change, increasing emissions and rising global temperatures have gradually affected the way we think about the future of our planet. Urban areas possess significant potential for reducing the energy consumption of the overall energy system. In recent years, there is an increasing number of research initiatives related to Urban Building Energy Modelling (UBEM) that focus on simulation processes and validation techniques. Although input data are crucial for the modelling process as well as for the validity of the results, the availability of input data and associated data formats were not analysed in detail. This paper closes the identified knowledge gap by presenting a taxonomic analysis of key UBEM components including: input data formats, simulation tools, simulation results and validation techniques. This paper concludes that over ~95% of the studies analysed were not reproducible due to the absence of information relating to key aspects of the respective methodologies such as data sources and simulation workflows. This paper also qualifies how weak levels of interoperability, with respect to input and output data, is present in all phases of UBEM.

1. Introduction

In 2014, the United Nations projected an increase in the number of people living in cities from 54% in 2014 to 66% in 2050 [1,2]. Furthermore, improved living standards come at a significant economic and environmental cost [3]. Globally, urban areas and buildings account for more than two-thirds of the energy consumed and 70% of CO₂ emissions [4]. Access to clean and sustainable energy is gradually being prioritised in different countries, thus increasing the importance of developing urban energy planning tools. Meaningfully predicting future

energy balances and energy flows at a urban scale requires significant resources. One key component of this urban energy mix is the buildings sector, particularly with respect to the associated energy demand and emissions.

Modelling the associated energy consumption and Greenhouse Gas Emissions (GHG) of buildings can benefit a number of use cases and stakeholders, for example design engineers, urban planners investigating renovation strategies and policy makers [5]. Western society has placed a significant emphasis on large scale renovation of the existing

* Corresponding author.

E-mail addresses: malhotra@e3d.rwth-aachen.de (A. Malhotra), j.bischof@iwu.de (J. Bischof), alexandru.nichersu@kit.edu (A. Nichersu), karl-heinz.haele@kit.edu (K.-H. Häfele), johannes.exenberger@tugraz.at (J. Exenberger), divyanshu.sood@ucdconnect.ie (D. Sood), james.allan@empa.ch (J. Allan), frisch@e3d.rwth-aachen.de (J. Frisch), treeck@e3d.rwth-aachen.de (C. van Treeck), james.odonnell@ucd.ie (J. O'Donnell), gerald.schweiger@tugraz.at (G. Schweiger).

URLs: <https://www.e3d.rwth-aachen.de> (A. Malhotra), <https://www.iwu.de> (J. Bischof), <https://www.iai.kit.edu> (A. Nichersu), <https://www.iai.kit.edu> (K.-H. Häfele), <https://www.tugraz.at/institute/ist> (J. Exenberger), <https://www.energyinstitute.ucd.ie> (D. Sood), <https://www.empa.ch/web/s313> (J. Allan), <https://www.e3d.rwth-aachen.de> (J. Frisch), <https://www.e3d.rwth-aachen.de> (C. van Treeck), <https://www.energyinstitute.ucd.ie> (J. O'Donnell), <https://www.tugraz.at/institute/ist> (G. Schweiger).

<https://doi.org/10.1016/j.buildenv.2021.108552>

Received 9 June 2021; Received in revised form 15 October 2021; Accepted 4 November 2021

Available online 17 November 2021

0360-1323/© 2021 The Authors. Published by Elsevier Ltd. This is an open access article under the CC BY license (<http://creativecommons.org/licenses/by/4.0/>).

Acronyms

ADE	Application Domain Extension
BEM	Building Energy Modelling
BEPS	Building Energy Performance Simulation
BIM	Building Information Modelling
BPS	Building Performance Simulation
CAD	Computer-aided design
CIM	City Information modelling
CityGML	City Geographical Markup Language
EERE	Energy Efficiency and Renewable Energy
Energy ADE	Energy Application Domain Extension
EU	European Union
FileGDB	ESRI File Geodatabase
FMI	Functional Mockup Interface
gbXML	Green Building XML
GHG	Greenhouse Gas Emissions
GIS	Geographic Information Systems
GML	Geographic Markup Language
HVAC	Heating, Ventilation and Air Conditioning
IDA ICE	EQUA IDA Indoor Climate and Energy
IFC	Industry Foundation Classes
INSEL	Integrated Simulation Environment Language
INSPIRE	Infrastructure for Spatial Information in Europe
JSON	JavaScript Object Notation
KML	Keyhole Markup Language
LoD	Levels of Detail
NMF	Neutral Model Format
NZEB	Nearly Zero Energy Building
OGC	Open Geospatial Consortium
OSM	Open Street Map
TRNSYS	Transient System Simulation Tool
UBEM	Urban Building Energy Modelling
UMI	Urban modelling Interface
USEM	Urban-scale Energy Modelling
XML	Extensible Markup Language

building stock. A comprehensive analysis of renovation activities and Nearly Zero Energy Building (NZEB) adapted in the European Union (EU) from 2012 to 2016 shows the significant impact these actions can have on building energy demands [6]. However, a reduction in energy consumption and an adjustment of peak electrical loads are only possible when supported by appropriate policies and technologies. One potential approach to quantifying sustainable and energy-efficient scenarios that integrates the perspectives of multiple stakeholder is Urban Building Energy Modelling (UBEM).

UBEM can analyse the impacts of neighbouring buildings and calculating urban-scale energy demands. Many UBEM principles are inherited from Building Energy Modelling (BEM), also called Building Energy Performance Simulation (BEPS), by using similar methodologies and techniques but at a larger scale. According to the United States Office of Energy Efficiency and Renewable Energy (EERE), BEM or BEPS is a physics-based software simulation of building energy usage [7]. Depending on the application, BEM requires various input data such as building geometry, construction details, data models, building physics data (such as U-value, density, heat capacity), Heating, Ventilation and Air Conditioning (HVAC), occupant behaviour, and occupancy profiles [8]. Using a software-based approach, thermal loads of buildings

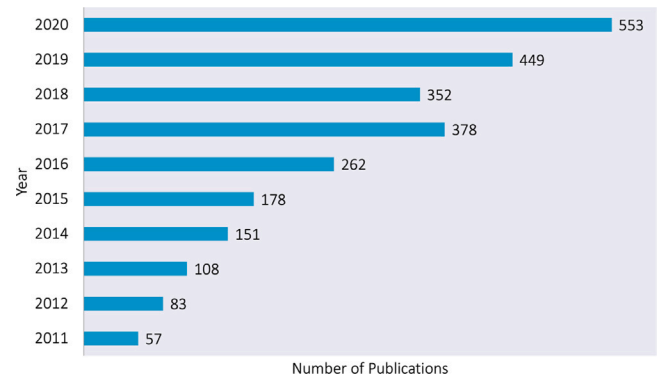


Fig. 1. Publication trend in the field of UBEM between 2011–2020.

are calculated based on a numerical evaluation of a mathematically described physical model. The software-based approach can also perform calculations and simulations related to occupant comfort simulation and energy costs. Generally, building models are less detailed in UBEM when compared to a single building BEM.

UBEM has two distinct approaches: top-down or bottom-up [9]. The former tends to work at an aggregated level i.e. at the national level and uses historical time-series energy consumption data or CO₂ emission data [10]. These models express the relationship between energy and economics at a large scale and connect variables such as fuel prices, gross domestic product and income to the energy sector. The issue with these models is that they often lack details relating to current and future building technologies that could influence the energy demand of a building [11]. On the other hand, the bottom-up approach works in a disaggregated manner and requires extensive details for each component in the building [12]. A bottom-up model accounts for individual dwelling's energy consumption and results are extrapolated to represent regional or national energy demands. This approach is useful when evaluating the performance of different energy efficiency measures and technologies [13]. This review paper focuses on bottom-up UBEM approaches. The top-down UBEM approach is, therefore, beyond the scope of this paper.

In recent years, researchers published multiple studies and review articles in the field of UBEM. The publication trend illustrated in Fig. 1 demonstrates the gradual increase in UBEM publications between 2011–2020. In 2018–2020, the number of published reviews articles were most significant to the field. One notable article from Hong et al. in 2020 [14] highlights the ten significant questions on UBEM. These questions streamline the main challenges, opportunities and future perspectives in the field of UBEM, the most significant of which are now discussed.

A seminal review paper by Reinhart and Davila [15] describes the domain of UBEM as “nascent” and focuses on: (1) input data (weather data, geometrical data and non-geometrical data), (2) thermal modelling and (3) results validation. Goy et al. [16] address the impact of input data on BEM at an urban scale using a Morris sensitivity analysis approach and shows that accessible data significantly impacts the entire modelling process. The sensitivity analysis highlighted that temperature set-point and thermal characteristics have a major impact on urban energy simulations. Chen et al. [17] discusses some of the key challenges of data integration for city buildings and provides an overview of public building data in CityGML, GeoJSON and ESRI File Geodatabase (FileGDB) for UBEM. Overall, the literature, however, omits the fact that multiple issues related to the practicalities of acquiring non-geometrical data at an urban level persist today.

Another review from Sola et al. [19] about Urban-scale Energy Modelling (USEM) classifies tools or engines used in the simulation of urban-scale energy systems. USEM is further classified into UBEM that estimates the energy demand at an urban scale endogenously and

Table 1
Overview of key input data categories used for UBE M based on [15] and [18].

Data category	Description
Location and geometry	Geographic location of the building, shape and orientation of the building's exterior boundary surfaces, boundary conditions (e.g. air, ground, adjacent building) of these surfaces and building's floor area size.
Openings	Location, shape and orientation of openings (doors and windows) in exterior boundary surfaces.
Thermal Zones and Thermal Boundaries	Geometric representation of internal zones (e.g. rooms) with distinct thermal conditions, and of contact surfaces (thermal boundaries) between two zones or one zone and the outside environment.
Building physics	Energy relevant thermal and optical parameters of external and internal building elements (interior and exterior walls, roof, internal slabs and ground plate, windows and doors).
Building systems	Information on energy relevant building systems, especially concerning the building's Heating, Ventilation and Air Conditioning (HVAC) systems.
Usage	Information concerning the energy relevant behaviour of the building's occupants such as nominal heating/cooling temperatures and ventilation rates in different thermal zones.
Internal heat gains	Internal heat generation by building systems (e.g. lighting, electrical facilities, hot water production) and occupants.

considers building stock characterisation and building energy demand modelling respectively. The characterisation of building stocks focuses on the archetypes and geometrical data from Geographic Information Systems (GIS). These archetypes can be difficult to create at a national, regional or city scale basis as the segmentation parameters and number of archetypes can vary on a case by case basis [20]. The review from Sola et al. [19] on thermal modelling tools also lists a number of bottom-up physics based UBE M tools and provides an overview of relevant characteristics of the individual tools. The review lacks validation and verification methods.

Ferrando et al. [21] also presents a comprehensive assessment of existing UBE M tools along with an overview of research and development potential. The review focuses on bottom-up physics-based UBE M tools and classifies the tools according to data input, simulation outputs, workflow of the modelling process, applicability regarding scale or type of the project and finally the potential users. Other articles such as Abbassabadi et al. [22], Han et al. [23], Li et al. [24], etc. also provide an overview of the field, however, a noticeable gap emerges in terms of inconsistencies related to input data types, simulation platforms, enrichment techniques and generation of simulation results.

The field of UBE M has expanded over the last few years and there is now a large variety of tools, data and approaches documented in literature. To date, there is limited transfer of knowledge, insights and data between studies and the reproducibility is compromised. This paper identifies key aspects that are required to ensure reproducibility the field of UBE M. We highlight future opportunities moving towards standardisation of UBE M. This paper aims to provide a taxonomic review of the input data, simulation tools and results validation as available today in the field of UBE M. The taxonomic approach scientifically identifies and categorises research in order to clearly understand different workflows used in UBE M. None of the systematic reviews discuss the aspect of reproducibility with respect to UBE M results; therefore this paper complements the literature. The approach we take in this paper distinguishes itself from other reviews as it examines the UBE M workflow in detail rather than considering a particular element or result with respect to the other categories. Most of the available studies fail to discuss the process of geometrical and non-geometrical enrichment. This paper segregates the different enrichment techniques, for example, enrichment of building physics and occupancy data. This paper also compliments the existing studies in the field of UBE M by quantifying the usage of different data models and simulation tools. Furthermore, this paper proposes a taxonomic method to review UBE M related research studies. The proposed taxonomy based approach along with the other available articles can be used to review and quantify the use of data models, simulation tools and enrichment techniques along with identification of reproducible studies.

This paper has five sections: Section 2 describes input models and an overview of various modelling methods and simulation tools for UBE M; Section 3 explains the taxonomic approach taken by the authors in the review process; The Sections 4.1, 4.2, 4.3 and 4.4 include an analysis based on the amount of information present in individual articles; The present study discusses the output of the taxonomic approach in Section 5 and the future opportunities in Section 6.

2. Background

This section provides an introduction to input data models (Section 2.1), building data models and formats (Section 2.2 and Section 2.3), and simulation tools (Section 2.4). In addition, this review served as a basis for defining the structure of the taxonomy and selecting appropriate keywords.

2.1. Input data models for city quarter information modelling

Physics-based UBE M simulations require detailed input data at the individual building level. These input data facilitate modelling of buildings' thermodynamic behaviour and their energy systems. Digital representations of buildings are a key aspect of UBE M and require structuring and organisation of raw input data. Moreover, spatial information related to the building and its orientation is necessary to simulate the building for energy related applications. Although, input data are essential to UBE M, obtaining sufficient and accurate building data at a large-scale is quite challenging [16]. The key input data categories used for UBE M are taken from noted studies by Reinhart et al. [15] and Chen et al. [18] (Table 1).

In the context of UBE M and City Information modelling (CIM), the terms *data model* and *data format* are often used interchangeably, however, it is important to highlight the differences between the two. A *data model* is an abstract, conceptual model of data elements (classes), their attributes and properties. Whereas, a *data format* is an implementation of a data model for a specific application (e.g. Extensible Markup Language (XML) [25] and JavaScript Object Notation (JSON) [26]). Data formats are generally derived from a data model so that the data can be stored, retrieved and used for a specific purpose or application. Though many data formats are standardised open formats, some are proprietary¹ formats and can only be encoded and decoded using propriety software tools. As the energy analysis at a city quarter level requires a broad availability of data and since most UBE M data formats have open specifications, proprietary formats are not considered in

¹ Data formats that are only supported by a specific software manufacturer or for a specific application (e.g. idm binary file for IDA ICE [27]).

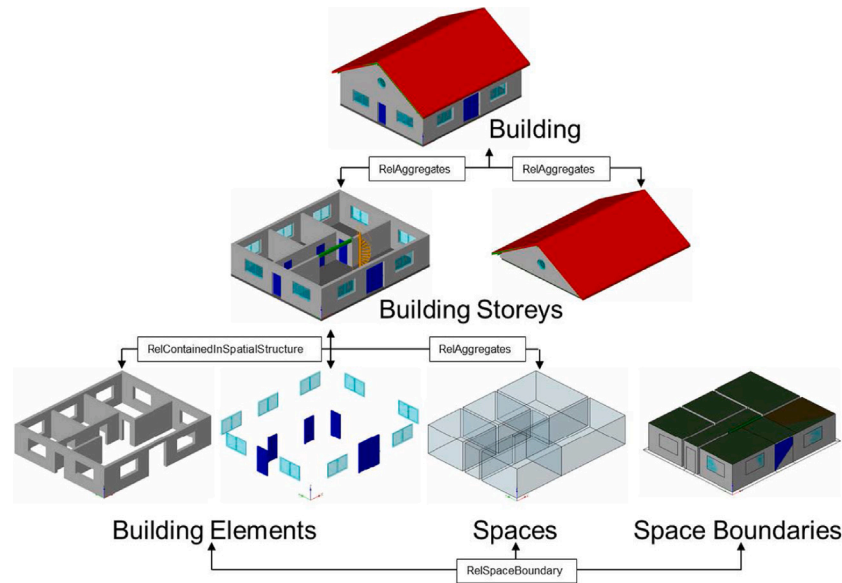


Fig. 2. Basic structure of a building in the IFC data model.
Source: [38].

context of this paper. Data formats can also be classified based on the application area for which a data format has been developed. Building data formats, specially designed for energy related use cases, can be distinguished from general formats which are originally being developed for other application domains (e.g. architecture, construction industry or mapping).

This study focuses on data models and formats that are primarily developed for energy studies and are maintained by dedicated standardisation bodies such as OGC [28] or SIG3D [29].

2.2. General building data models and formats

Industry Foundation Classes (IFC)

IFC [30] is the only non-proprietary Building Information Modelling (BIM) format that is an open and international standard. buildingSMART develop and maintain the IFC standard [31]. The data model is based on a STEP Physical File (SPF)² [32] and uses the modelling language EXPRESS [33]. From this abstract data model, a number of data formats are derived, such as IFC SPF (based of STEP part 21 [34]) and the XML-based representation IFC-XML (based on STEP part 28 [35]) are considered for energy applications. As IFC models were originally developed for application areas in Architecture, Engineering and Construction, it primarily supports a volumetric representation of the building elements. Moreover, IFC models use hierarchically structured local coordinate systems, for which the root can be located in a global (geographic or geodetic) coordinate reference system. Structurally (see Fig. 2), IFC supports the partition of a building (IfcBuilding) into storeys (IfcBuildingStorey), physical building elements (IfcBuildingElement) with openings, as well as rooms (IfcSpace) with space boundaries [36]. Using the property set concept, a number of physical properties can also be related with the building elements. Furthermore, IFC entities, relations and property sets also exist for representing the HVAC components of a building. These sets principally allow for the estimation of internal heat gains in buildings by software requiring such data [37].

² IFC-SPF can be read as text and is based on the ISO standard for text representation of EXPRESS data models.

City Geographic Markup Language (CityGML)

CityGML of the OGC [28] is an XML-based open data format for storage and exchange of virtual 3D city models [39]. The current version CityGML 2.0 is an application schema of OGC's Geographic Markup Language (GML) version 3.1.1 [40]. GML models generally use absolute coordinates in a well-defined coordinate reference system. Moreover, CityGML is subdivided into a number of independent thematic modules. These modules are all based on the *CityGML Core* module. In the context of this paper, only the *Building Module* is considered as it contains the classes to represent a single building (*Building*), its exterior and interior structure (see Fig. 3). In contrast to IFC, CityGML uses a surface geometry representation to model the different building elements.

An important feature of CityGML is the concept of Levels of Detail (LoD). The LoD definition supports the representation of real world objects with different geometric and semantic detailing [41]. Depending upon the information present in the model, CityGML models are defined in five LoDs. The most crude of which is LoD 0, a two and a half dimensional Digital Terrain Model over which an aerial image or a map may be draped and buildings are represented only by their footprints. In LoD 1, the building's exterior shell is approximated by a prismatic volume and is represented as a single geometry. LoD 2 supports a generalised geometrical representation of the exterior shell and its subdivision into different boundary surfaces. This subdivision is made for representing the exterior parts of the walls, roofs and ground plates. In most cases, energy simulation software can directly process the generalised geometry. Moreover, in some countries, CityGML LoD 2 data sets are most commonly available as open source [42]. LoD 3 and LoD 4 models represent the exterior shell with more geometrical details (e.g. roof overhang), however, they mostly require geometrical pre-processing before being used for energy simulation software [43]. In LoD 3, it is additionally possible to represent the openings (doors and windows) within the boundary surfaces. LoD 4 supports the additional representations of the building's interior structure with rooms which are bounded by interior boundary surfaces (see Fig. 3).

Using CityGML data for energy simulations does also have a number of challenges. Except for a purely geometric representation, building system components cannot be represented in CityGML. A means to characterise "shared walls" between adjacent buildings is also missing. The topological structure of a room model in LoD 4 is also not explicitly represented. This hinders the derivation of the energy-relevant space boundaries. The most significant drawback of using CityGML is that

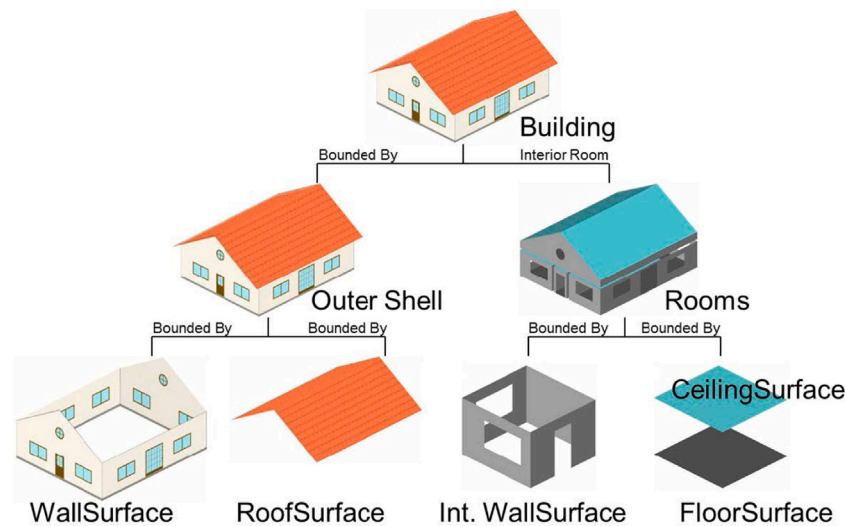


Fig. 3. Basic structure of a building in the CityGML data format.
Source: [38].

it lacks attributive information as there are no concepts to represent material or usage parameters. For assessing the physical behaviour of a building, only the year of construction is (sometimes) available. Furthermore, data concerning the occupant's behaviour or internal energy gains must be derived from the specified building function. To overcome the lack of information in pure CityGML models, the Energy Application Domain Extension (Energy ADE) [44] can be used, which will be explained in detail in Section 2.3.

INSPIRE Building

Infrastructure for Spatial Information in Europe (INSPIRE) is an initiative of the European Parliament and Council to establish a European Spatial Data Infrastructure [45]. In the context of INSPIRE, GML-based data models are developed for different technical aspects such as the representation of individual buildings. Until 2020, the public agencies in all member states, if they are related with one of the INSPIRE technical areas, need to deliver their spatially related data in the corresponding INSPIRE data format. For buildings, INSPIRE provides two formats [46]: (i) The base model *INSPIRE Building* enables the geometrical representation of a building's exterior shell in four different CityGML LoD. The non-geometrical properties of the INSPIRE *Building* class also follow the CityGML standard. (ii) The extended model *INSPIRE Building Extended* largely corresponds to CityGML. For the *Building* class, the INSPIRE models provide a number of additional, energy relevant properties such as information about the building's connection with utility networks, its energy performance class, floor area and heating system. Concerning the ability to support energy related simulations, the model INSPIRE Building is comparable with CityGML LoD 1. Though, in the same LoD as CityGML, the INSPIRE Building Extended could have slight advantages compared to CityGML. However, the INSPIRE directive only declares the base model as mandatory. Furthermore, the extended model has, to the best knowledge of the authors, has yet to be applied by researchers and only a draft of the corresponding data format is available.

Open Street Map (OSM)

Open Street Map (OSM) is a world-wide collaboration project, aiming to develop a free, editable digital map [47]. A large number of local contributors collect 2D position and contour of real-world objects (e.g. buildings) and generate a semantic classification and attribution in form of key-value pairs. For this, the OSM organisation proposes an ontology, however, the contributors are not forced to use it. For buildings, this ontology enables to specify the type and function of a

building and provide parameters to describe its 3D structure (including height, number of storeys and roof type). Due to its availability and relative ease-of-use, OSM is frequently used for projects on city quarter or city level [48,49].

KML/Collada

The Keyhole Markup Language (KML) is an XML-based data format for visualisation and annotation of 3D geographic information. These are also referred as COLLADA models [50]. Originally developed by Google Inc. to support the GoogleEarth [51] application, the KML format (from version 2.2) is an official OGC standard [52]. In contrast to the formats mentioned previously, KML is not a semantic data format. This implies that the geometry contained in a KML data set has no well-defined meaning and except of the two text attributes, name and description, no attributive information can be related with KML objects. Furthermore, for the application context of this paper and also in the reviewed articles, KML/Collada is not considered.

2D cadastre models

In many countries, the surveying and cadastre agencies provide their data in standardised, semantic data formats such as ALKIS/NAS [53] in Germany. This standard geometrically describes a building by its footprint and several parameters for the 3D-structure. Besides important parameters such as the year of construction, building function, number of storeys, type of roof and floor area, no energy relevant building properties are recorded. The direct use of cadastre data for building energy simulations is therefore limited to spatial modelling.

2.3. Building data models specially designed for energy related applications

CityGML Energy ADE

The Energy ADE is an extension of the CityGML standard and is developed by an international working group [54] to support the application area of "energy". It uses the general CityGML ADE concept [55] supporting two different extension approaches: (i) by defining new classes, and (ii) by extension of existing CityGML classes with new attributes and relations. By using the two approaches, the actual version 1.0 of the Energy ADE [43,44] principally supports all the information mentioned in Table 1. The Energy ADE data model contains four functional modules that are derived from the *Energy ADE Core* module. A couple of supporting classes for modelling time series, usage schedules and weather data are also available. The *Core* module, in particular, extends the CityGML *Building* class with energy relevant properties and

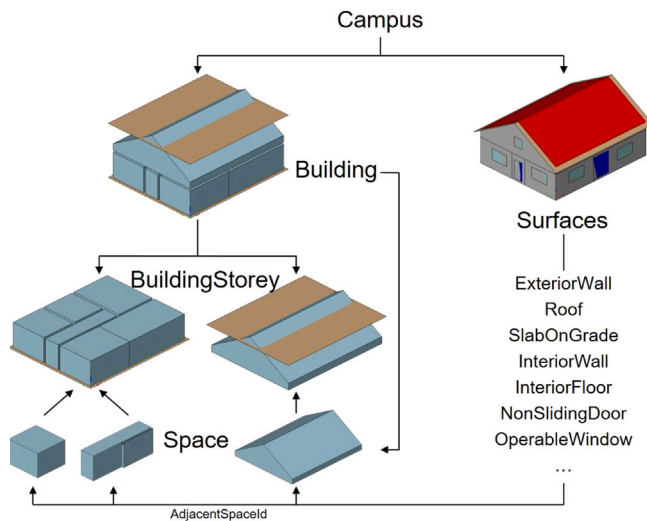


Fig. 4. Basic structure of a building in the gbXML data format.
Source: [38].

relations along with the abstract base classes of the functional modules. The *Building Physics* module enables to subdivide a building into one or more thermal zones. These zones exchange energy among each other or with the outer environment via thermal boundaries and thermal openings. Moreover, the thermal and optical properties of these objects are modelled by the classes of the *Materials and Constructions* module. The module *Occupants Behaviour* supports the definition of usage zones that are related within a thermal zone. Here, the usage is primarily defined by specifying time-variant profiles for ventilation rates and heating/cooling set-point temperatures. Furthermore, specific concepts are available to model internal heat gains due to occupants, lighting, electrical appliances and domestic hot water production. Finally, the *Energy Systems* module contains several classes to represent the energy relevant building systems (energy conversion, distribution and storage systems) and its corresponding energy flows.

Green building XML (gbXML)

gbXML [56] is an open, XML based data format supporting the data exchange between 3D BIM systems and engineering analysis tools and is supported by leading manufacturers of CAD software such as Autodesk, Bentley and Graphisoft. Some converters, such as Open Studio Core [57], also exist to extend its application to building energy simulations. Furthermore, gbXML also contains all the information listed in Table 1.

Fig. 4 depicts the basic structure of a gbXML model. The root element (*Campus*) may refer to one or more building objects (*Building*) that are subdivided into storeys (*BuildingStorey*) and rooms (*Space*). Internal and external thermal boundaries are modelled in parallel (*Surface*) and include material and opening information. Each *Surface* may be related with one or two *Space* objects. The *Space* class supports the representation of usage profiles, internal heat gains and building systems.

2.4. Simulation tools

In the context of this paper, we introduce two different categories for simulation and modelling tools: (i) Simulation tools and (ii) Auxiliary tools. Simulation tools are self-contained simulation applications, which are used to generate building energy demands without the need for external tools. Auxiliary tools are separate applications to work with the simulation tools to extend features and improve usability. Hong et al. [14] and Ferrando et al. [21] provide a discussion of

modelling approaches (physics-based, reduced-order, and data-driven approaches).

Recent literature highlights the importance of co-simulation in UBE [14,58]. Co-simulation involves exporting the simulation model into a neutral format and using multiple simulation tools to simulate different parts of the model [59]. A main advantage of using co-simulation within UBE is the ability to build multi-domain models [19]. Co-simulation can be used to couple different tools for modelling buildings, HVAC systems, district heating systems, or power distribution networks. A recent study on promising standards and tools for co-simulation shows that the Functional Mockup Interface (FMI) is the most promising standard for co-simulation [60]. The Functional Mockup Interface is a tool independent standard for co-simulation and the exchange of dynamic models which is currently supported by more than 140 tools [61].

2.4.1. Simulation tools commonly used for UBE

CitySim is a free urban performance simulation engine that comprises a solver and a graphical user interface. Calculation functionalities include building thermal, urban radiation, occupant behaviour, plant and equipment models. *CitySim* has recently been further developed as *CitySim+* with additional features for enhanced scalability, distributed simulation and incorporation of a data layer based on CityGML/Energy ADE [62]. *City Energy Analyst* is an open source tool for analysing and optimising energy systems at a district level. The tool enables users to investigate financial, energy and carbon benefits of different design scenarios in conjunction with schemes of distributed generation. *EnergyPlus* [63] is a whole-building simulation software to model the different energy demands of buildings. *EnergyPlus* is, by far, the most commonly reported tool in the reviewed literature for this paper. There are also a number of tools developed to interface with *EnergyPlus* as a simulation engine. The tools dependent on *EnergyPlus* are detailed in Section 2.4.2. *EQUA IDA Indoor Climate and Energy (IDA ICE)* is a commercial building simulation tool with libraries written in either Modelica or Neutral Model Format (NMF) [27] and can be used to model the performance of buildings including energy consumption, lighting or HVAC systems. *IDA ICE* can import various formats including Sketchup and IFC. *Integrated Simulation Environment Language (INSEL)* [64] is a block diagram simulation system which can be used for the simulation of photo-voltaic systems, solar thermal systems and dynamic building simulations. Ready models are available in *INSEL*, however, extensions to the existing models and the creation of new models is also possible [65]. The *SimStadt* tool developed using *INSEL* is briefly explained in 2.4.2. *Modelica* is an object oriented modelling language that is supported by various open source and commercial tools [66]. There are multiple open source *Modelica* libraries for buildings, HVAC systems, district heating systems, and energy systems [67]. The commonly used *Modelica* libraries in the domain of BPS are also detailed in Section 2.4.2. *Simulink* is a graphical modelling language, built on top of the programming language Matlab and is also one of the most common simulation environments [67]. *TRNSYS* is a simulation tool mainly used in the field of thermal engineering, such as buildings and HVAC systems [68].

2.4.2. Auxiliary tools

Table 2 gives an overview of Simulation Tools and the corresponding Auxiliary Tools.

EnergyPlus. The tool *Combined Energy Simulation And Retrofitting (CESAR)* is used for modelling the energy performance of buildings, districts and cities in Switzerland. *CESAR* compiles and simulates *EnergyPlus* models based on statistical data of the Swiss Building Stock [69]. An open-source, Python implementation, called *CESAR-P*, was released in April 2021 [75].

CityBES [72] is a web-based tool for modelling and analysing the thermal performance of a city's building stock. *CityBES* uses *OpenStudio* [71] and *EnergyPlus* to simulate building energy performance and *CityGML* to represent and exchange 3D city models.

Table 2
The auxiliary tools based on the previously defined Section 2.4.1.

Auxiliary tools	Simulation tool	Summary	Interface	Availability
CESAR [69]	EnergyPlus [63]	Archetypical generation of EnergyPlus models	CMD	Closed
UMI [70]		Urban modelling plugin for Rhino 3D	GUI	Freeware
OpenStudio [71]		Various tools to support EnergyPlus	GUI	Open-Source
CityBES [72]		Web-based information exchange of urban building modelling	GUI	Freeware
TEASER [73]	Modelica [66]	Archetypical generation of Modelica models	GUI/CMD	Open-Source
SimStadt [74]	INSEL [64]	UBEM simulation platform	GUI	Closed

Urban modelling Interface (UMI) is an urban scale energy simulation plugin for the Rhinoceros 3D [76] CAD software that includes operational energy, embodied energy and mobility. EnergyPlus is used for its building energy performance simulations, Daysim [77] for its daylight simulations and a Python module for its walkability evaluations.

Modelica. Several frameworks such as *BIM2Modelica* [78] and *TEASER* [73] automatically derive Modelica models based on IFC and CityGML respectively. The BIM2Modelica toolchain generates Modelica building models from BIM models based on the IFC format and uses a GUI with the software infrastructure of CoTeTo [79] for simplifying the code generation process for BPS. The “Tool for Energy Analysis and Simulation for Efficient Retrofit” (TEASER) on the other hand is an open framework for urban energy modelling of building stocks. TEASER provides an interface for CityGML data as input, data enrichment and the export of ready-to-simulate Modelica simulation models of a single building or at urban scale. *AixLib* [80], *Buildings* [81], *BuildingSystems* [82] and *IDEAS* [83] are the Modelica libraries that are used in TEASER for BPS at an urban scale and were brought to a common base in the IEA EBC Annex 60 Project [84].

Integrated Simulation Environment Language (INSEL). *SimStadt* is a simulation platform that can be used for workflows related to Solar and PV potential analysis, energy demand and CO₂ emission calculations, and refurbishment scenarios generation and simulation [74]. INSEL is the simulation engine used [65].

2.5. Single building to an urban scale

The data models (Section 2.1) that represent a single building (e.g. a BIM) or city models (e.g. a GIS instance) serve very different application requirements, purposes and stakeholders. Although, both data-model types have the ability to store object geometries, surface materials, appearances, building physical characteristics and surroundings, their underlying model architectures differ considerably. This arises due to the adaptation to specific requirements of their respective originating domains [85]. Furthermore, the granularity of geometrical information stored in a BIM is typically unsuitable for transformation into the inputs required by UBEM [86], this arises due to different users, applications, developmental stages, spatial scales, coordinate systems, semantic and geometric representations along with different information storage and access methods [87]. In the context of scaling an energy model of a single building to an urban context, the availability of input data is a persistent challenge. Detailed data at the building level are only partially available in most countries [42]. Data sources include buildings’ construction plans, BIM models and documentation related to physical on-site visits. For building stocks, however, accumulating the required data for BEM is much more complex. In a practical implementation of UBEM, this leads to a use of multiple available data sources, which are combined and enriched to provide all of the necessary information. Therefore, three general data sources are used: Open access, closed and commercial [42]. In an urban context, the cluster of information is provided either in form of publications (or standards) or as structured and standardised data formats (e.g. gbXML and CityGML Energy ADE).

The energy simulation tools (Section 2.4) used for modelling a single building (in BEM) or an urban area/city (in UBEM) service very different application purposes. Urban scale building energy analysis

integrates the concepts of building energy use with the related HVAC systems and environmental interactions [88]. Furthermore, control strategies are being developed to computationally reduce the overall energy demands of urban areas [89]. In an urban context, simulating each building separately without considering the interaction between them can lead to inaccuracies, especially for those cities characterised by a high density or average height of buildings [90]. Building-to-building influences such as mutual shading affect the overall energy demand calculations of buildings [91]. The influence of mutual shading is also important when aiming to understand the thermal effects of the individual construction materials within buildings. Urban areas also create individual climatic conditions called the urban micro-climate [92]. GIS-based urban micro-climate models contribute to the urban energy analysis as micro-climate affects building energy consumption [93]. Different aspects of the local climate, including air temperature and wind patterns, can be modified according to geographical areas to efficiently compute the energy demands of the buildings [94]. Micro-climate and inter-building shading are highly dependent on the specific geographical context and must be meaningfully captured within appropriate UBEM tools. Defining all of the inputs and features for such simulations has been comprehensively captured by Quan & Li [95], Sanaieian et al. [96], Ko, Y. [97], Anderson et al. [98], Yang & Jiang [99]. The article by Quan & Li [95] is complementary to our work, and, therefore the inclusion of a separate classification for urban influences is currently deemed outside the scope of this paper.

The modelling approaches used in BEM and UBEM differ fundamentally [100,101], their respective simulation and validation requirements also differ [102,103]. The definition and development of validation procedures and validation data sets for a single building, e.g. (BESTEST [104] or ASHRAE standard 140 [105]), is less complicated than validation procedures and data sets for UBEM (such as DESTEST [106]) due to the unavailability of open data sets, the lack of standardised input formats and significantly increased computational requirements for UBEM simulations [107].

The presentation of simulation results can affect a modeller’s interpretation of model behaviour. This is an important aspect of simulation documentation and therefore must be included. Another noteworthy challenge for the BEM and UBEM communities is the reproducibility of studies. Reproducible studies must include a detailed description of the input data along with its availability and granularity, the simulation tool with its settings and access restrictions, and documentation of the simulation results [108]. This is important in order to compare and standardise different approaches used within different simulation workflows.

3. Method

A taxonomic review synthesises existing literature; in the context of this paper it allows (i) identification of commonly used applications for UBEM, data models, and simulation tools as well as (ii) evaluation of the reproducibility of the reviewed papers. We developed a taxonomy based on categories, sub-categories and keywords — referred to as the structure of the taxonomy in the following (see Fig. 6). We defined the structure of the taxonomy based on a two stage process. In the first stage, we developed the basic structure based on existing review papers [11,15,109] and the energy simulation workflow defined in [110].

Table 3
Keywords used for UBE M paper classification and generation of the co-citation network diagram (Fig. 5).

Category	Keywords
Type of construction	dwelling, apartment ^a , building ^a , house ^a , national, retrofitting, neighbour ^a , residential, non-residential, commercial, office ^a , school, institution ^a , education ^a , university, industry
Scale	urban, city, district ^a , region ^a , large ^a , city quarter, 3D city model ^a , neighbourhood, building stock
Input	U-value, HVAC, Spatial, Occupancy, Building archetypes, Building typology
Data models	CityGML, gbXML, IFC, Energy ADE
Data formats	Shape File, GeoJson, CAD, GML, IDF
Simulation tools	TRNSYS, EnergyPlus, INSEL, CitySim, CityBEM, BuildSysPro/Dymola, Modelica
Enrichment	TEASER, Uncertainty
Output	energy model ^a , energy simulation ^a , energy performance, energy demand, energy consumption, time series

^aused to search singular, plural and similar forms of keywords.

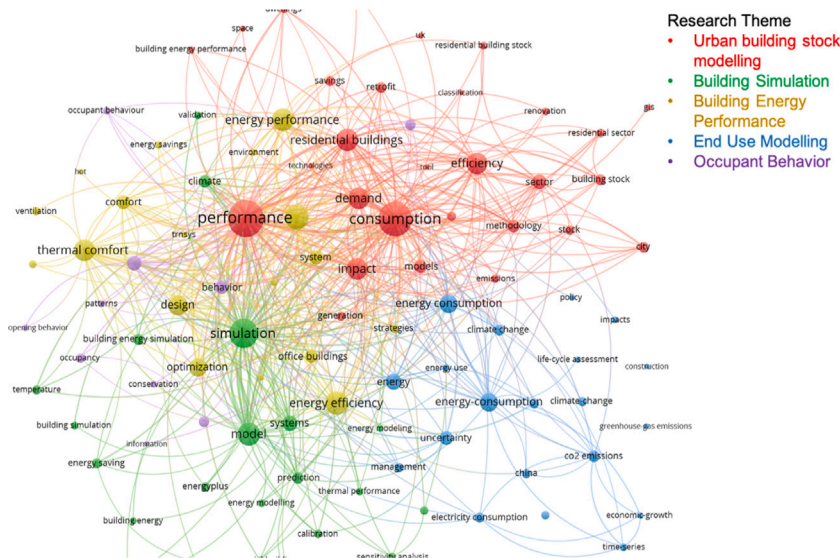


Fig. 5. Occurrence of frequently used keywords in Urban Building Energy Modelling.

In the second stage, experts from the international IBPSA Project 1 (work package “City District Information Modeling” [111]) further developed the taxonomy in a workshop setting. The final taxonomy consists of the following four main categories: *input data, simulation tools, simulation results, validation and verification*.

The **input data** are further subdivided into multiple sub-categories. These include data format, building specific information regarding LoD and building physics, availability of the input data, occupancy profiles, and geometrical data analysis. **Simulation tools** is also subdivided into multiple sub-categories and keywords. These include individual tools, availability of the tools, external support of data formats, support for co-simulation, and computational details such as multiprocessing and system configuration. **Simulation results, validation and verification** include the sub-categories results (e.g. timestamps, 3D maps), validation, and verification. Reproducibility is of major importance for studies related to UBE (see Section 2.5). The previously mentioned categories (input data, simulation tools and simulation results, validation and verification techniques) form the basis for evaluating the reproducibility of the reviewed research. As reproducibility is a feature that is dependent on the other categories, it is evaluated as a sub-category under each of the afore mentioned categories within the taxonomy. This is due to the importance of unambiguous and consistent interpretation of literature in the field of UBE.

The identification of relevant publications is crucial for the proposed method. Since the underlying research field is broad and diverse, not all relevant publication could be identified with a literature search using a limited number of keywords. In a first step, we identified an initial list of potentially relevant publications using a combinations of the

keywords listed in [Table 3](#) in Scopus [[112](#)] and Google Scholar [[113](#)] databases. The relevant keywords were defined in the expert workshop within IBPSA Project 1. We included journal and conference articles published after 2014. In a second step, we removed those publications that were beyond the scope of this review. We acknowledge the importance of urban influences, such as mutual shading and micro-climate, in UBEM related review processes, however, their inclusion within the keywords, taxonomy and the review is foreseen as a future work.

The identified keywords, in Table 3, are supported by a network diagram that illustrates their occurrence in research articles from 2014 to 2020 inclusive. The diagram (shown in Fig. 5) is generated using the VOSviewer tool [114]. The VOSviewer categorises the keywords into five clusters based on closely related research themes in the field of UBM. Within the network diagram, the size of each node defines the frequency of occurrence of specific keyword in research articles and the link with other keywords defines the co-occurrence of related keywords.

In total 72 papers [12,20,48,62,69,70,72,74,103,115–177] are identified and reviewed using the taxonomy and the keywords network map.

3.1. Research boundaries

The taxonomy based approach in this paper is descriptive, extensive and hypothesis-driven. The keywords restrict the scope of the literature search; we defined appropriate keywords in an iterative way in workshops with experts. Although we endeavoured to keep the keyword

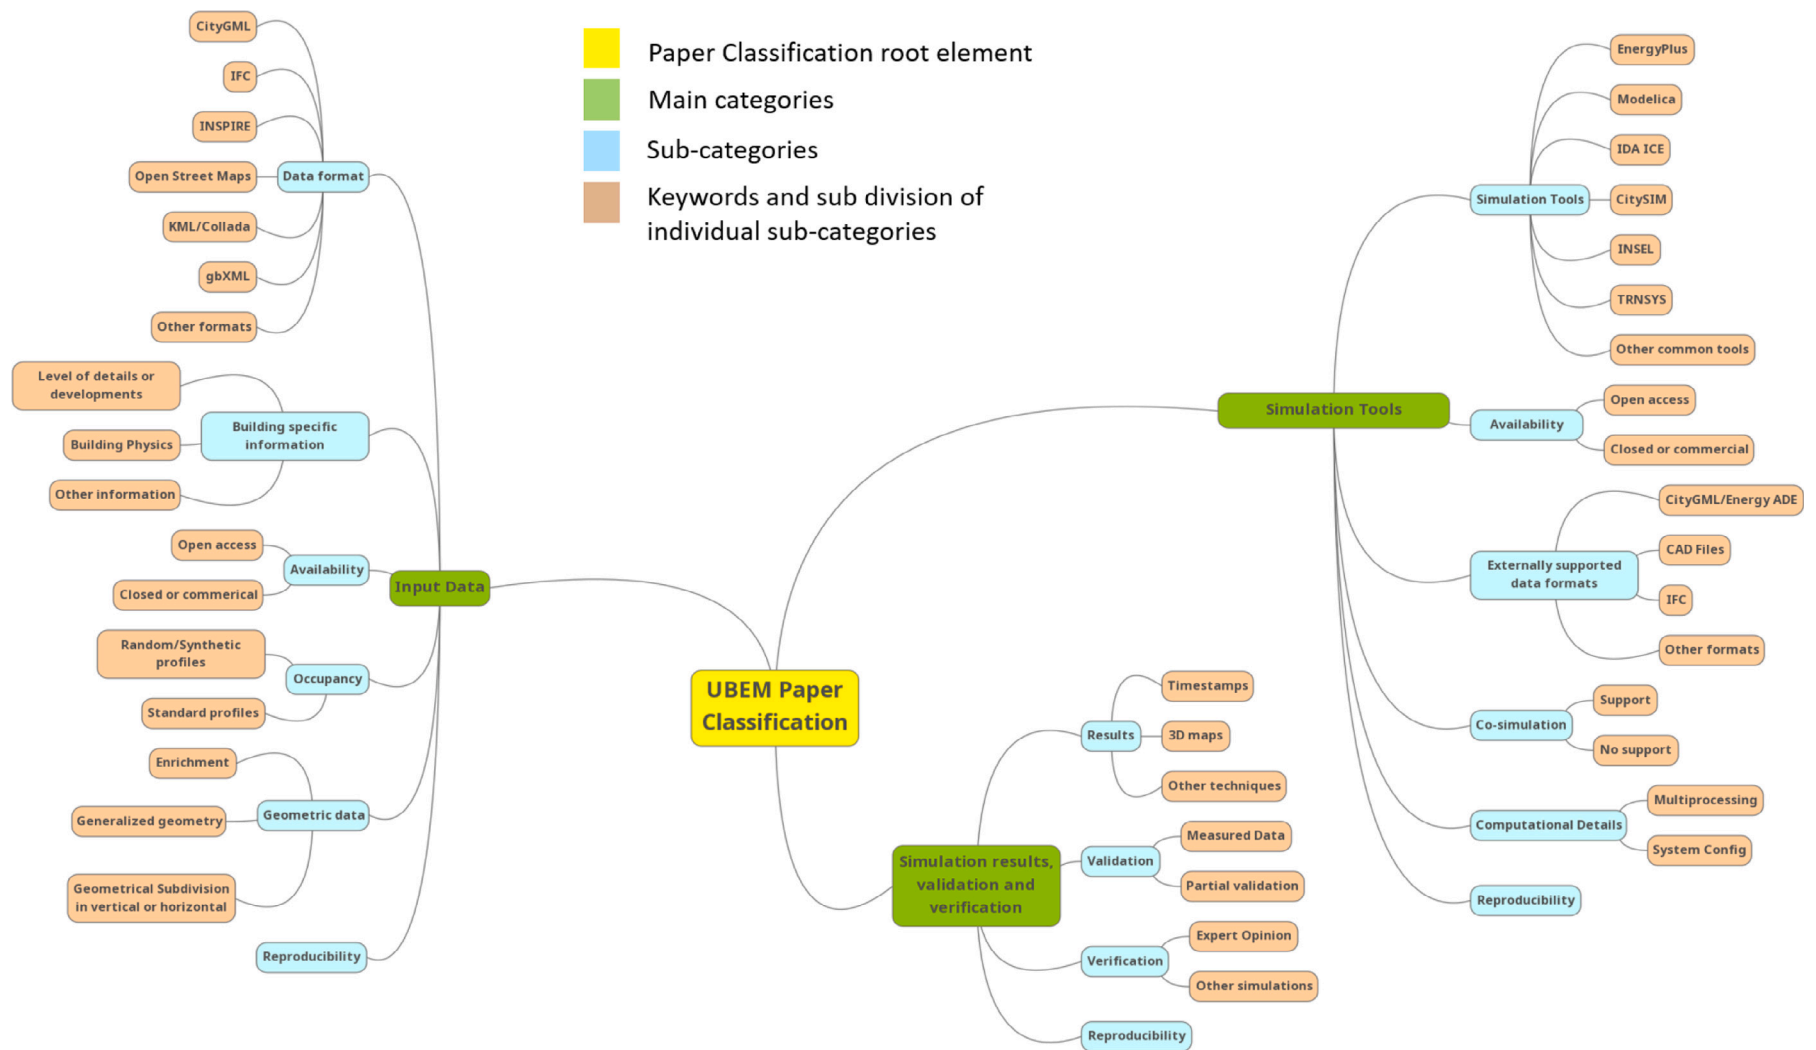


Fig. 6. Overview of the taxonomy implemented for UBEM paper classification and review.

Table 4

Comparison of different data models based on the amount of information present. A detailed description of the information levels ('+++', '++', '+') is given in Table 5. The information level '-' indicates that specific information is not present in the individual data model.

	Geo-referencing	Openings	Thermal Zones Boundaries	Building Physics	Energy systems	Usage	Internal heat gains
IFC [178,179]	+++	+++	+++	+++	+++	+++	+++
CityGML LoD1 [62,178,180]	+++	-	-	-	-	+	-
CityGML LoD2 [62,178,180]	+++	-	+	+	-	+	-
CityGML LoD3 [62,178,180]	+++	+++	+	+	-	+	-
CityGML LoD4 [62,178,180]	+++	+++	++	+	-	++	-
INSPIRE Building [45,181]	+++	-	-	+	-	+	-
INSPIRE Building Extended [45,181]	+++	+++	++	++	+	++	-
OSM [182,183]	++	-	-	-	-	+	-
KML/Collada [184,185]	++	-	-	-	-	-	-
National cadastre formats [42]	++	-	-	+	-	+	+
CityGML Energy ADE (LoD2) [62,178,180]	+++	+++	+++	+++	+++	+++	+++
gbXML [178,186,187]	++	+++	+++	+++	+++	+++	+++

Table 5

Comparison of different data models - Description of information levels ('+++', '++', '+') assigned in Table 4.

	+++	++	+
Georeferencing	All coordinate systems	limited number of coordinate systems	No coordinate system, but corresponding coordinates are possible
Openings	Openings supported		
Thermal Zones/Boundaries	Thermal zones and thermal boundaries	Thermal boundaries for buildings and spaces	Thermal boundaries for buildings
Building physics	Full support	partial support	Weak support
Energy systems	Full support	partial support	Weak support
Usage	Usage for buildings and rooms and extended usage properties	Usage for buildings and rooms	Usage for buildings
Internal heat gains	Full support	partial support	Weak support

selection process as open and objective as possible, we acknowledge that certain studies may have been unintentionally omitted.

4. Results

In this section, we present the key findings from the taxonomy based analysis; this includes an analysis of data models (Section 4.1), simulation tools (Section 4.2), simulation results and validation techniques (Section 4.3), and reproducibility (Section 4.4).

4.1. Input data models for city quarter information modelling

Most data models are georeferenced and contain the information related to the geographical location of the building. However, some such as CityGML LoD 1-2, INSPIRE Building and OSM lack the information about thermal openings, building physics and energy systems. A comparison of different data models highlights the strengths and weaknesses of these formats (Table 4) while a comparison of the data storage capabilities of each model is also worth noting (Table 5).

The taxonomy based approach shows that 27% of the investigated studies use the CityGML data model for the location and geometry of the building. All studies using explicitly georeference CityGML, yet, 36% of the studies fail to provide information relating to the data model used and 18% of studies contain insufficient detail with respect to georeferenced geometry. Fig. 7 gives a distribution of the data models that are used in the reviewed studies.

Out of the studies that use CityGML, only 27% provide information about the LoD used for simulations. Strikingly, only 20% of the data models are made available to be used in other research and 7% of the studies fail to mention the availability of the data models. For the geometric and spatial data used to create the digital representation of the physical aspects of the buildings, 77% of the papers provide details for the geometrical aspects used in their studies. 42% of studies mention some form of pre-processing of the geometry before simulations. This pre-processing includes approaches such as extrusion of building heights using footprints, 3D geometry transformation from one format to another, etc. For studies that consider CityGML data, 3% mention the transformation from 2D to 3D geometry while only 1% of the total articles convert LoD 2 models into LoD 3 models. Moreover, with respect to a horizontal and vertical subdivision of buildings, 72% of the total papers fail to provide any information on this topic.

Furthermore, as occupant behaviour is acknowledged as a key source of uncertainty between predicted and actual building energy demands, many researchers attempt to model occupants presence and adaptive actions more realistically [188]. In the reviewed articles, 49% of the studies use standard occupancy profiles while 15% use individual profiles and 3% use synthetic and random profiles. For the remaining 33% of the studies, no information regarding occupancy is available.

For UBEM related simulations, "enrichment" is the process of creating attributes using inference and statistics to create a fully parameterised model of each building. Enrichment is necessary as urban scale data are often incomplete with respect to the requirements of UBEM.

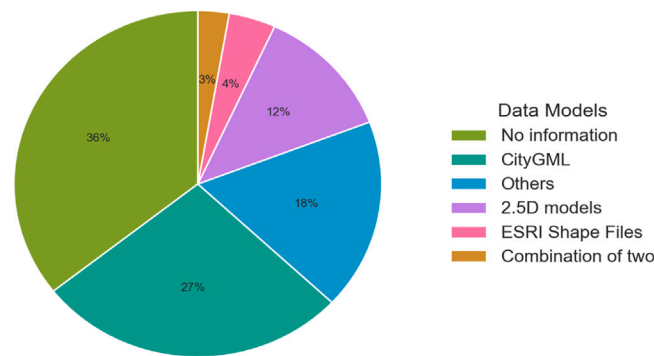


Fig. 7. Distribution of data models used in the reviewed articles. Sums of percentages \neq 100% are due to rounding errors in the annotations. Here combination of two models implies that two data models were used with respect to different simulation environments to compare the results.

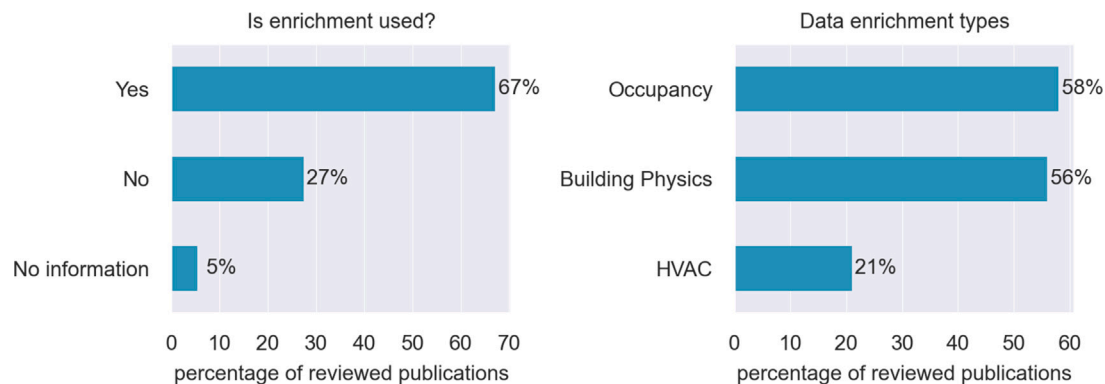


Fig. 8. (Left) An overview of the usage of enrichment in the reviewed articles. Sums of percentages \neq 100% are due to rounding errors in the annotations (Right) An overview of the data enrichment types considered in different studies.

Of the 72 articles considered, this review found that 67% of the studies use data enrichment; 58% performed occupancy enrichment, 56% performed enrichment of the building physics; and 21% carried out HVAC enrichment. Furthermore, 67% of the studies use an archetype based enrichment approach for urban-scale simulations. This reliance on archetypal enrichment highlights an opportunity for data generators to produce more complete data sets with attributes suitable for UBEM alongside the geometric data. It is acknowledged that this would be a challenging undertaking but if additional attributes, such as building materials, age, could be attached to some of the most commonly used spatial and geometric data formats, such as CityGML with Energy ADE, the UBEM modelling process could be reproducible, automatable and transparent and, thus, lead to increased confidence in the final results. Fig. 8 highlights the use of enrichment and its types in different studies.

In the previous sections, the various data formats and models used in UBEM are discussed. However, when analysing the literature, the authors often found it difficult to determine which data model is being used in a given study. In many papers the data model is not explicitly stated. This can distort the results in Fig. 7. For example, a community that is actively involved in the further development of a particular data model may be more likely to state the data model used (e.g. IBPSA Project 1 and CityGML). It was also found that a majority of studies (63%) are not reproducible as the data are not shared alongside the publication. Although data security and privacy issues prevent authors from openly sharing data, these observations highlight an issue with the communication of the data used in such studies across scientific literature. Scientific transparency and continued improvement of the UBEM process relies on clear explanations about the data used so those interested can replicate and verify the work. As a result, the field of UBEM reported in scientific literature is fragmented and non-reproducible. In future, it is vital that authors provide readers with the necessary details to understand and replicate the study with their own

data. The next section details an evaluation of simulations tools and their usage in urban energy simulations.

4.2. Simulation tools

The scientific community has developed multiple simulation tools and workflows for UBEM in recent years. Table 6 provides an overview of simulation tools regarding: (i) availability (commercial, open source, freeware), (ii) externally supported UBEM data formats, and (iii) compatibility with FMI co-simulation.

The taxonomic approach focuses on the individual elements of the published studies and enables a consistent assessment of the reported studies in order to establish opportunities in both the data generation and the development of simulation tools for UBEM. In total, 25 different simulation approaches are identified (see Fig. 9). These range from simplified steady-state models to dynamic models. This diversity highlights the difficulty of cross-comparing the results generated by UBEM studies. No information is provided on the simulation approach used in 11% of the studies. By far, the most common simulation tool is EnergyPlus and its extensions that are used in 38% of the reviewed studies. The second most common is INSEL which is specified in 11% of the reviewed papers whereas Modelica is used in 6% and Matlab is used in 5% of the studies. The authors often found it challenging to consistently assign simulation kernels to the respective study. Several cases made reference to their own quasi-static energy balance calculations based on standards such as ISO 52016-1 [190]. Please note that several of the studies that mention their own tools incorporate similarly self-developed algorithms and these may make up a larger percentage of the total than the authors have recorded. It is interesting to note, that while EnergyPlus makes up the largest portion of simulation, it is not possible to directly simulate the most common geometry data input - CityGML files. Active research is being done to extend the data models, using

Table 6
The tools for UBEM demand modelling identified in the taxonomic review.

Simulation tools	Externally supported UBEM data formats	Availability	Support FMI for Co-Simulation
CitySIM Pro [62]	CityGML Energy ADE, common CAD files	Available by request	No
City Energy Analyst [135]	Internal config ^a	Open source	No
EnergyPlus [63]	None ^b	Open source	Yes
IDA ICE [27]	IFC, common CAD files	Commercial	No
INSEL [64]	None ^b	Freeware	Unknown
Matlab/Simulink [189]	None ^b	Commercial	Yes
Modelica Libraries [80–82]	None ^b	Open Source/Commercial	Yes
TRNSYS [68]	None ^b	Commercial	Yes

^aInternal configuration files that are defined entirely in the software but uses Open Street Map data.

^bNo known inbuilt support for data formats/models identified in the input data section.

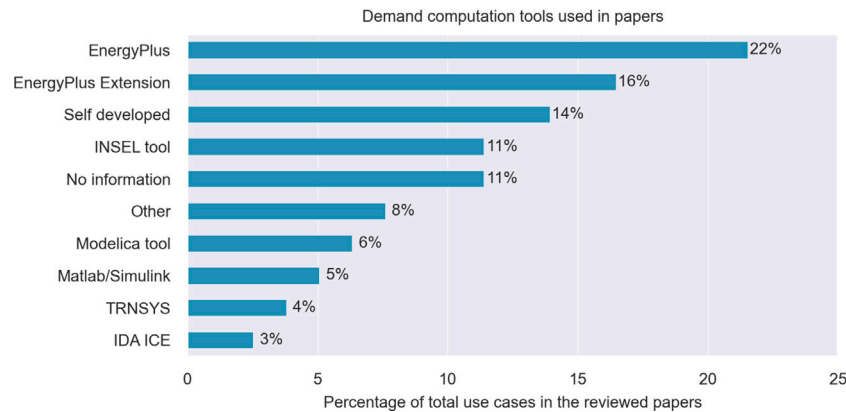


Fig. 9. Simulation tools used in the reviewed papers. 100% is the total number of simulation cases in all papers (e.g. if a paper compares SimStadt and EnergyPlus, it is treated as two separate cases, one using SimStadt and one using EnergyPlus). Category 'Other' combines all tools that are used in only one of the reviewed papers, including: City Energy Analyst, Energy Carbon and Cost Assessment for Building Stocks (ECCABS), CitySim+, DeST, SwissRes, GIS/ArcView.

application domain extensions (Energy ADE). This is done to provide sufficient additional attributes to enable building energy performance simulation [191]; however challenges with geometry processing still need to be overcome and this highlights an area for future research efforts. The importance of both self-contained simulation environments and their auxiliary applications are important for UBEM studies.

4.3. Simulations results and validation

Research in the domain of urban building energy modelling and simulation has been developing at a fast pace in recent years. This is mostly due to urgent demand for energy efficient solutions in the building sector, as explained in Section 1. The surge of new computational methods applied in UBEM requires coherent analysis, presentation and validation to give confidence in the results.

In the studies reviewed, 54% focus on the simulation of heating energy demands as their main objective. The other 46% provide additional or different results, such as electric energy demand or predictions of CO₂ emissions. Time resolutions of demand simulations range include yearly (26%), monthly (27%), daily (1%), hourly (36%) and subhourly (5%). The taxonomy recorded the finest time resolution reported in each study (Fig. 10).

Some data models also allow for the storage of simulation results. This offers the possibility to link demand data – obtained either from simulations or measurements – directly with the building data model. It also serves as an important step for demand based analysis. Furthermore, the storage of simulation results facilitates the sharing of data and expedites the creation of comprehensible visualisations of energy demand predictions at an urban scale. This is especially important as the UBEM based research results are not only relevant for the scientific community, but also for practitioners, decision-makers and local stakeholders. In total, only 16% of all reviewed papers store the

results in the original data model. From the 27% of works that use CityGML (see Fig. 7), 40% use this functionality.

The results presented in 95% of the scientific papers considered in this review are not reproducible (see Section 4.4). In addition, approximately 30% of all papers do not validate the presented results based on measured data or other methods whereas 7% provide only partial validations (Fig. 10). In the context of this paper, partial validation is labelled if, in an article, either the data models or the simulation results are validated. Contrary to this, in 44% of the studies, comparisons of simulation results against measured data are performed. Articles such as Meha et al. [147], which use bottom-up and top-down heat demand mapping methods for small municipalities, compare the simulation results of the two approaches with measured data. Other studies such as Österbring et al. [155], Mastrucci et al. [156], Nageler et al. [115], Li et al. [132] also compare their simulation results to measured values. Although the number of articles that compare their results to measured data is high, however, due to a consistent lack in availability of open measured data [16,192,193] it is often difficult for simulation scientists and research communities to compare their models and calculation in the field of UBEM. Once openly available, the measured data can be used to validate different approaches, workflows and simulation environments. Within the 44% of the (previously mentioned) studies, none openly allows the usage of their individual measured data to the simulation community and thereby making the approach/simulation irreproducible. Furthermore, 10% of the studies (such as Streicher et al. [136], Turcsanyi, P. [150], Eikermeier et al. [151]), perform the comparison against results from other scientific contributions, energy performance certificates and national standards. Zirak et al. [122], Monien et al. [142], Murshed et al. [165] also verify their simulations with other environments and platforms.

Another important aspect is the way in which authors chose to visualise the results of the energy modelling. For the taxonomy, three

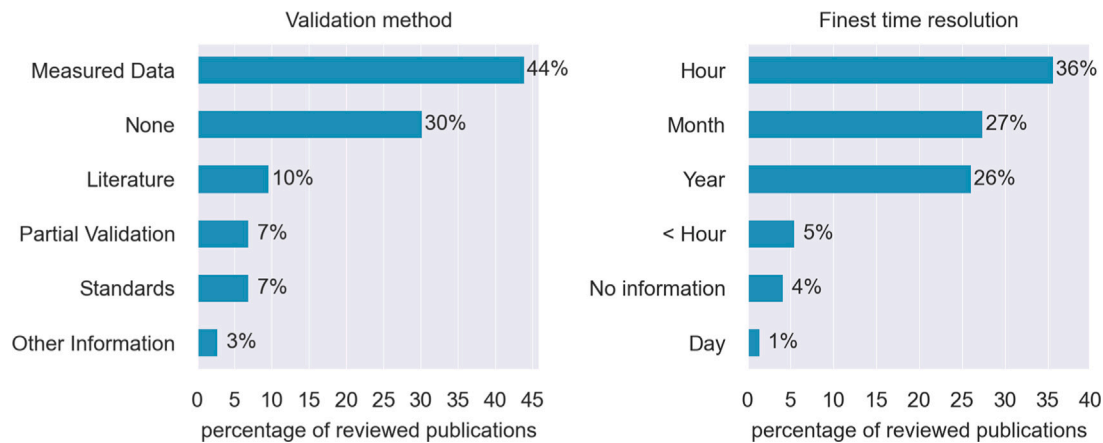


Fig. 10. Relative distribution of validation methods (left) and smallest time resolution units (right) in the reviewed literature. Sums of percentages \neq 100% are due to rounding errors in the annotations.

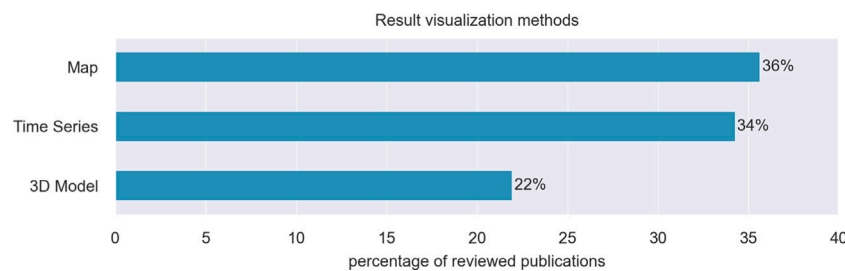


Fig. 11. Types of result visualisation methods in reviewed proceedings and their relative distribution. Sums of percentages \neq 100% are due to rounding errors in the annotations.

main visualisation categories are defined: time series plots, illustration of results with 2D maps, and visualisations using 3D spatial models. Other plots such as error plots or flow charts, etc. are not considered in this paper. It was found that 62% of all papers use one of the three aforementioned visualisation methods, with the relative distribution depicted in Fig. 11. Used in almost equal measure are time series plots, with 34% of the papers and 2D maps with 36%. Less common, but nevertheless present in every fifth paper (22%), is the use of 3D spatial models. An important observation is that, in total, 44% of all papers use either one of spatial illustrations methods, indicating that either the energy modelling results are somehow stored in the data model or the studies use an additional file for visualisation purposes and overlay the files with the simulation results.

4.4. Reproducibility

We categorise studies as reproducible if the simulation results can be reproduced by others. An overwhelming majority of reviewed publications ($\sim 95\%$) cannot be reproduced. This is either due to the unavailability of input data and/or the impossibility to reproduce the simulation workflow. In terms of input data, we identified three common reasons why studies cannot be replicated: (i) the spatial and/or energy thematic models used are not available as open-source and/or open-data; (ii) data sources are not mentioned; (iii) pre-processing steps are not described in detail. For the simulation workflow, either the software tool is not available and/or the simulation method used or developed in the paper is not described thoroughly.

5. Discussion

The taxonomy based approach in this paper highly depends on the (i) selection of keywords (ii) classification of categories, and (iii) selection of appropriate articles. Although the keyword selection process is transparent, the authors are aware that this is a threat to validity;

nevertheless, to the authors' knowledge, this is the most transparent selection process. This review selects articles that use bottom-up UBEM approaches. Although the classification and review is based on the selected keywords, however, in future, we would like to widen the domain of our approach, extend the keyword list and review papers focusing on urban influences and other simulation tools.

This taxonomic review identified CityGML to be the most commonly used input data format for UBEM. Although CityGML provides the geometrical and geographical information of a building, the format omits energy relevant features and properties. CityGML can be extended (e.g. resulting in the Energy ADE) with energy-specific semantic information by subsequent enrichment processes. The results show that data models such as gbXML and CityGML Energy ADE, which can represent energy relevant information, are seldom used. Harmonising the two models with comparable capabilities would combine the advantage of CityGML's availability with gbXML's implementations. Currently, IFC, an extensive standardised and open building information model, plays no role in UBEM. Even though several data models exist and are used for UBEM-based approaches, we presume that their acceptance is restricted due to limited availability. As not many detailed data sets are available in standardised formats, broader usage of such formats is further limited. Therefore, we argue that research should focus on generation of representative data sets (e.g. standard archetypes) that can be combined with georeferenced data. This would also require geodata to contain the correct allocation variables such as building age, use and refurbishment status.

We found that EnergyPlus is the most frequently used simulation kernel for UBEM; a significant number of simulation kernels are also self-developed. Different kernels depend on different input data, simulation settings, predefined parameters, and model assumptions. In general, not all simulation settings are transparent to the community. Many of the identified simulation tools are complex (e.g. EnergyPlus) and require a large number of input variables to compute the energy demand. This conflicts with the scarcity of available building stock

data, leading to the necessity of data enrichment and, consequently, propagates high input variable uncertainties into the simulations.

The most common output of the simulation process is yearly heating energy demand in an hourly time resolution. Usually, these time series are stored without any meta data. This hinders data interoperability and collaboration between researchers further. For validation, a substantial share of 44% of the reviewed articles validate the results based on measured data, whereas, 30% do no validation at all. The authors consider several possible reasons, e.g. that there is no access to the required data or the required data may not be available. Furthermore, we observe that the challenge of validation is primarily a problem of data availability rather than a methodological problem. Therefore, it would be beneficial for UBEM validation if there were open standardised validation data sets that provide complete input data along with measured energy consumption for a representative building stock.

Reproducibility is a key part of any scientific process. However, the results show that for the majority of papers analysed in this review, it is not possible to reproduce the results. Although, lower reproducibility is a problem across peer-reviewed literature in general [194,195], wherever possible, open data sets should be used as this helps the scientific community to efficiently develop, validate and maintain energy simulation tools and workflows.

6. Conclusion and future work

This paper analyses different aspects of UBEM through a taxonomic approach. This includes various data types, simulation environments, results and visualisation, and the reproducibility of research studies. 27% of the authors use CityGML input data for UBEM approaches. As CityGML data sets are often openly available, future developments should focus on the enrichment of open data sets and on storing the information as common data formats such as gbXML and CityGML Energy ADE. There is a mismatch between the most commonly utilised input data format (CityGML) and the most prominently used simulation environment (EnergyPlus (22%)). Since EnergyPlus does not support the input of CityGML format, further research addressing the direct use of this format is an important step towards standardising UBEM approaches. Further research should define metrics that allow for a transparent comparison of different simulation kernels. 44% of the studies validate the outputs using measured data. As validation is one of the key aspects of research studies, development of a UBEM-benchmark validation data set should be an objective of future research. Future research should also address the validity and uncertainties of enrichment variables (e.g. U-Values) and the generation of standard enrichment data sets. A large number of the articles (34%) focus on outputs as time series. Future work should provide sufficient meta data to describe the simulation results. Since only a limited number of the identified studies are reproducible, future work should thoroughly describe the granularity and quality of input data, the data models, the simulation parameters and settings, and details of the validation procedure. In addition, sample data sets should be published alongside the results in order to compare different approaches. In the future, articles detailing top-down UBEM approaches should be systematically reviewed as this will complement the results presented in this paper. Quantification of environmental and inter-building influences such as micro-climate and mutual shading should be included in the future research using different case studies and implementations. An integration of the present taxonomy with the classifications, related to urban context influences, made in previous studies is planned in the future. A main task for the future will be a committed support of open data, software and processes in the field of UBEM.

Declaration of competing interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

Acknowledgements

This work emerged from the IBPSA Project 1, an international project conducted under the umbrella of the International Building Performance Simulation Association (IBPSA). Project 1 will develop and demonstrate a BIM/GIS and Modelica Framework for building and community energy system design and operation.

This publication has emanated in part from research supported in part by a research grant from Science Foundation Ireland (SFI) under the SFI Strategic Partnership Programme Grant number SFI/15/SPP/E3125. The opinions, findings and conclusions or recommendations expressed in this material are those of the author(s) and do not necessarily reflect the views of the Science Foundation Ireland.

This publication has emanated in part from research supported in part by a research grant from the Sustainable Energy Authority of Ireland under Grant number 19/RDD/537. The opinions, findings and conclusions or recommendations expressed in this material are those of the author(s) and do not necessarily reflect the views of SEAI.

The reported research has been conducted within the project CityVR (879419), which has received funding in the framework of "Stadt der Zukunft", a research and technology program of the Austrian Ministry for Transport, Innovation and Technology (BMVIT).

A contribution to this work was funded as part of the EMPAPOST DOCS-II program, the European Union's Horizon 2020 research and innovation program under the Marie Skłodowska-Curie grant agreement 754364.

References

- [1] United Nations, World Urbanization Prospects: The 2014 Revision, Highlights (ST/ESA/SER.a/352), United Nations, Department of Economic and Social Affairs, Population Division, 2014, p. 32, <http://dx.doi.org/10.4054/DemRes.2005.12.9>, URL <http://esa.un.org/unpd/wup/Highlights/WUP2014-Highlights.pdf>.
- [2] H. Ritchie, M. Roser, Urbanization, Our World in Data (2018).
- [3] M. Yusoff, Improving the quality of life for sustainable development, in: IOP Conference Series: Earth and Environmental Science, Vol. 561, IOP Publishing, 2020, 012020.
- [4] H.V. Ribeiro, D. Rybski, J.P. Kropp, Effects of changing population or density on urban carbon dioxide emissions, *Nature Commun.* 10 (1) (2019) 1–9, <http://dx.doi.org/10.1038/s41467-019-11184-y>.
- [5] U. Ali, M.H. Shamsi, C. Hoare, E. Mangina, J. O'Donnell, Review of urban building energy modeling (UBEM) approaches, methods and tools using qualitative and quantitative analysis, *Energy Build.* 246 (2021) 111073, <http://dx.doi.org/10.1016/j.enbuild.2021.111073>.
- [6] D.-G. for Energy, Comprehensive study of building energy renovation activities and the uptake of nearly zero-energy buildings in the EU, European Commission, 2019, p. 306, <http://dx.doi.org/10.2833/14675>, URL <https://op.europa.eu/en/publication-detail/-/publication/97d64ca-5847-11ea-8b81-01aa75ed71a1/language-en/format-PDF/source-119528141>.
- [7] T.L. Garwood, B.R. Hughes, M.R. Oates, D. O'Connor, R. Hughes, A review of energy simulation tools for the manufacturing sector, in: *Renewable and Sustainable Energy Reviews*, Vol. 81, Elsevier Ltd, 2018, pp. 895–911, <http://dx.doi.org/10.1016/j.rser.2017.08.063>.
- [8] M. Krarti, Analysis of Large-Scale Energy Efficiency Programs, Elsevier Inc., 2018, pp. 547–610, <http://dx.doi.org/10.1016/b978-0-12-849869-9.00009-0>.
- [9] F. Ascione, R.F. De Masi, F. de Rossi, R. Fistola, M. Sasso, G.P. Vanoli, Analysis and diagnosis of the energy performance of buildings and districts: Methodology, validation and development of urban energy maps, *Cities* 35 (2013) 270–283, <http://dx.doi.org/10.1016/j.cities.2013.04.012>.
- [10] M. Kavacic, A. Mavrogianni, D. Mumovic, A. Summerfield, Z. Stevanovic, M. Djurovic-Petrovic, A review of bottom-up building stock models for energy consumption in the residential sector, *Build. Environ.* 45 (7) (2010) 1683–1697, <http://dx.doi.org/10.1016/j.buildenv.2010.01.021>.
- [11] L.G. Swan, V.I. Ugursal, Modeling of end-use energy consumption in the residential sector: A review of modeling techniques, in: *Renewable and Sustainable Energy Reviews*, Vol. 13, (8) Pergamon, 2009, pp. 1819–1835, <http://dx.doi.org/10.1016/j.rser.2008.09.033>.
- [12] M. Österbring, E. Mata, L. Thuvander, M. Mangold, F. Johnsson, H. Wallbaum, A differentiated description of building-stocks for a georeferenced urban bottom-up building-stock model, *Energy Build.* 120 (2016) 78–84, <http://dx.doi.org/10.1016/j.enbuild.2016.03.060>.

- [13] U. Ali, M.H. Shamsi, M. Bohacek, C. Hoare, K. Purcell, E. Mangina, J. O'Donnell, A data-driven approach to optimize urban scale energy retrofit decisions for residential buildings, *Appl. Energy* 267 (2020) 114861.
- [14] T. Hong, Y. Chen, X. Luo, N. Luo, S.H. Lee, Ten questions on urban building energy modeling, *Build. Environ.* (2020) <http://dx.doi.org/10.1016/j.buildenv.2019.106508>.
- [15] C.F. Reinhart, C. Cerezo Davila, Urban building energy modeling - A review of a nascent field, *Build. Environ.* 97 (2016) 196–202, <http://dx.doi.org/10.1016/j.buildenv.2015.12.001>, URL <https://linkinghub.elsevier.com/retrieve/pii/S0360132315003248>.
- [16] Solène Goy, François Maréchal, Donal Finn, Data for urban scale building energy modelling: Assessing impacts and overcoming availability challenges, *Energies* 2 (4244) (2020) 1–23.
- [17] Y. Chen, T. Hong, X. Luo, B. Hooper, Development of city buildings dataset for urban building energy modeling, *Energy Build.* 1 (510) (2018) 1–36.
- [18] T.H. Chen, Y. Da, S. D'Oca, C. Fei, Ten questions concerning occupant behavior in buildings: The big picture, *Build. Environ.* 114 (2017) 518–530, <http://dx.doi.org/10.1016/j.buildenv.2016.12.006>.
- [19] A. Sola, C. Corchero, J. Salom, M. Sanmarti, Simulation tools to build urban-scale energy models: A review, *Energies* 11 (12) (2018) <http://dx.doi.org/10.3390/en1123269>, URL <https://www.mdpi.com/1996-1073/11/12/3269>.
- [20] U. Ali, M.H. Shamsi, C. Hoare, E. Mangina, J. O'Donnell, A data-driven approach for multi-scale building archetypes development, *Energy Build.* 202 (2019) 109364, <http://dx.doi.org/10.1016/j.enbuild.2019.109364>.
- [21] M. Ferrando, F. Causone, T. Hong, Y. Chen, Urban building energy modeling (UBEM) tools: A state-of-the-art review of bottom-up physics-based approaches, *Sustainable Cities Soc.* 62 (2020) 102408, <http://dx.doi.org/10.1016/j.scs.2020.102408>, URL <http://www.sciencedirect.com/science/article/pii/S2210670720306296>.
- [22] N. Abbasabadi, R. Azari, A framework for urban building energy use modelling, *Environ. Steward.* (2016) 386–394.
- [23] M. Han, Z. Wang, X. Zhang, An approach to data acquisition for urban building energy modeling using a Gaussian mixture model and, *Buildings* 11 (30) (2021) 1–30.
- [24] W. Li, Y. Zhou, K. Cetin, J. Eom, Y. Wang, G. Chen, X. Zhang, Modeling urban building energy use: A review of modeling approaches and procedures, *Energy* 141 (2017) 2445–2457, <http://dx.doi.org/10.1016/j.energy.2017.11.071>.
- [25] K.W. Boone, Extensible markup language, in: *The CDA TM Book*, Springer, 2011, pp. 23–34.
- [26] F. Pezosa, J.L. Reutter, F. Suarez, M. Ugarte, D. Vrgoč, Foundations of JSON schema, in: *Proceedings of the 25th International Conference on World Wide Web*, 2016, pp. 263–273.
- [27] T. Kalamees, IDA ICE: The Simulation Tool for Making the Whole Building Energy- and HAM Analysis, Tech. rep., Annex 41 MOIST-ENG, Tallinn Technical University, Kalamees2004, 2004, pp. 1–6.
- [28] OGC, OGC home page, 2021, URL <http://www.opengeospatial.org/>.
- [29] SIG3D, SIG3D home page, 2021, URL <https://www.sig3d.org/>.
- [30] ISO, ISO 15386:2013 Industry Foundation Classes (IFC) for Data Sharing in the Construction and Facility Management Industries, Tech. rep., International Organization for Standardization, 2013.
- [31] buildingsSMART, BuildingSMART home page, 2021, URL <http://www.buildingsmart.org/>.
- [32] ISO, ISO 10303-1:1994 Industrial Automation Systems and Integration – Product Data Representation and Exchange – Part 1: Overview and Fundamental Principles, Tech. rep., International Organization for Standardization, 1994.
- [33] ISO, ISO 10303-11:2004 Industrial Automation Systems and Integration – Product Data Representation and Exchange – Part 11: Description Methods: The EXPRESS Language Reference Manual, Tech. rep., International Organization for Standardization, 2004.
- [34] ISO, ISO 10303-21:2016 Industrial Automation Systems and Integration – Product Data Representation and Exchange – Part 21: Implementation Methods: Clear Text Encoding of the Exchange Structure, Tech. rep., International Organization for Standardization, 2016.
- [35] ISO, ISO 10303-1:2007 Industrial Automation Systems and Integration – Product Data Representation and Exchange – Part 28: Implementation Methods: XML Representations of EXPRESS Schemas and Data, Using XML Schemas, Tech. rep., International Organization for Standardization, 2007.
- [36] V. Bazjanac, L. Berkeley, Space boundary requirements for modeling of building geometry for energy and other performance simulation, in: *Proceedings of the CIB W78 2010: 27th International Conference*, Cairo, Egypt, 2010, pp. 16–18.
- [37] G. Benndorf, N. Réhault, M. Clairembault, T. Rist, Describing HVAC controls in IFC - method and application, *Energy Procedia* 122 (2017) 319–324, <http://dx.doi.org/10.1016/j.egypro.2017.07.330>, URL <http://www.sciencedirect.com/science/article/pii/S187661021732934X>.
- [38] K.-H. Häfele, J. Benner, STREAMER Deliverable 6.5: Advance Mapping Structures and Standards, Copyright © 2015 by Streamer consortium, 2015, pp. 2–80, URL <http://www.streamer-project.eu/Downloads/D6.5.pdf>.
- [39] G. Gröger, T.H. Kolbe, C. Nagel, K.-H. Häfele, OGC City geography markup language (CityGML) encoding standard, version: 2.0.0, Open Geospatial Consortium, OGC 12-019, 2012.
- [40] S. Cox, P. Daisey, R. Lake, C. Portele, A. Whiteside, OpenGIS® Geography Markup Language (GML), Version: 3.1.1, Project Document: OGC 03-105r1, Tech. rep., Open Geospatial Consortium, OGC 12-019, 2004.
- [41] J. Benner, A. Geiger, G. Gröger, K.-H. Häfele, M. Löwner, Enhanced lod concepts for virtual 3D city models, *ISPRS Ann. Photogramm. Remote Sens. Spatial Inf. Sci.* 2 (2013) 51–61.
- [42] A. Malhotra, J. Bischof, J. Allan, J. O'Donnell, T. Schwengler, B. Joachim, G. Schweiger, A review on country specific data availability and acquisition techniques for city quarter information modelling for building energy analysis, in: *Proceedings of the BauSIM 2020 – 8th Conference of IBPSA Germany and Austria*, Graz, 23-25 September, 2020, pp. 543–549.
- [43] A. Geiger, J. Benner, K.H. Häfele, V. Hagenmeyer, Thermal energy simulation of buildings based on the cityGML energy application domain extension, in: *Proceedings of the BauSIM2018 - 7th German-Austrian IBPSA Conference*, 2018, pp. 295–302.
- [44] G. Agugiari, J. Benner, P. Cipriano, R. Nouvel, The energy application domain extension for citygml: enhancing interoperability for urban energy simulations, *Open Geospatial Data Softw. Stand.* 3 (1) (2018) <http://dx.doi.org/10.1186/s40965-018-0042-y>.
- [45] European Union, Directive 2007/2/EC of the European Parliament and of the Council of 14 March 2007 Establishing an Infrastructure for Spatial Information in the European Community (INSPIRE), Tech. rep., European Union, 2007.
- [46] European Union, INSPIRE-BU, 2010: D2.8.III.2, Data Specification on Buildings, Tech. rep., European Union, 2010.
- [47] OpenStreetMap, Openstreetmap web page, 2021, URL <https://www.openstreetmap.org>.
- [48] J. Schiefelbein, J. Rudnick, A. Scholl, P. Remmen, M. Fuchs, D. Müller, Automated urban energy system modelling and thermal building simulation based on OpenStreetMap data sets, *Build. Environ.* 149 (2019) 630–639.
- [49] A. Alhamwi, W. Medjroubi, T. Vogt, C. Agert, GIS-based urban energy systems models and tools: Introducing a model for the optimisation of flexibilisation technologies in urban areas, *Appl. Energy* 191 (2017) 1–19.
- [50] Khronos Group, Collada: Specification and schema, 2021, URL <https://www.khronos.org/collada/>.
- [51] N. Gorelick, M. Hancher, M. Dixon, S. Ilyushchenko, D. Thau, R. Moore, Google earth engine: Planetary-scale geospatial analysis for everyone, *Remote Sens. Environ.* (2017) <http://dx.doi.org/10.1016/j.rse.2017.06.031>.
- [52] T. Wilson, OGC KML Encoding Standard, Version: 2.2.0, OGC 07-147r2, Tech. rep., Open Geospatial Consortium, 2008.
- [53] Arbeitsgemeinschaft der Vermessungsverwaltungen, (AdV) der Länder der Bundesrepublik Deutschland, Dokumentation zur Modellierung der Geoinformationen des amtlichen Vermessungswesens, Tech. rep., Arbeitsgemeinschaft der Vermessungsverwaltungen (AdV) der Länder der Bundesrepublik Deutschland, 2021, URL <http://www.adv-online.de/Adv-Produkte/Liegenschaftskataster/ALKIS/binarywriterservlet?imgUid=42b23fd2-1153-911a-3b21-718a438ad1b2&uBasVariant=11111111-1111-1111-1111-111111111111>.
- [54] J. Benner, Energy ADE Wiki: Web Page, Tech. rep., EnergyADE Consortium, 2021, URL https://www.citygmlwiki.org/images/3/38/Energy_ADE_specification_2018_03_25.pdf.
- [55] L. van den Brink, J. Stoter, S. Zlatanova, UML-based approach to developing a cityGML application domain extension, *Trans. GIS* 17 (6) (2013) 920–942.
- [56] Green Building Studio, Open green building XML schema, 2021, URL <http://www.gbxml.org/>.
- [57] NREL, Open studio core: ForwardTranslator class reference, 2021, URL https://s3.amazonaws.com/openstudio-sdk-documentation/cpp/OpenStudio-1.14.0-doc/energyplus/html/classopenstudio_1_1energyplus_1_1_forward_translator.html.
- [58] P. Nageler, G. Schweiger, H. Schranzhofer, R. Heimrath, T. Mach, L.-M. Fochler, C. Hochenauer, J. Fluch, I. Leusbrock, C. Fink, Co-simulation workflow for the dynamic modelling and simulation of large-scale district energy systems, in: *Building Simulation 2019, International Building Performance Simulation Association*, 2020, pp. 3698–3705.
- [59] C. Gomes, C. Thule, D. Broman, P.G. Larsen, H. Vangheluwe, Co-simulation: A survey, in: *ACM Computing Surveys*, 2018, <http://dx.doi.org/10.1145/3179993>.
- [60] G. Schweiger, C. Gomes, G. Engel, I. Hafner, J. Schoegg, A. Posch, T. Noudui, An empirical survey on co-simulation: Promising standards, challenges and research needs, *Simul. Model. Pract. Theory* 95 (2019) 148–163, <http://dx.doi.org/10.1016/j.simpat.2019.05.001>, URL <https://linkinghub.elsevier.com/retrieve/pii/S1569190X1930053X>.
- [61] T. Blochwitz, M. Otter, M. Arnold, C. Bausch, C. Clauss, H. Elmqvist, A. Junghanns, J. Mauss, M. Monteiro, T. Neidhold, D. Neumerkel, H. Olsson, J.-V. Peetz, S. Wolf, The functional mockup interface for tool independent exchange of simulation models, in: *Proc. of the 8-Th International Modelica Conference*, Linköping University Electronic Press; Linköpings universitet, Modelica Association, Dresden, Germany, 2011, pp. 173–184, <http://dx.doi.org/10.3384/ecp11063105>, https://www.modelica.org/events/modelica2011/Proceedings/pages/papers/05_1_ID_173_a_fv.pdf.

- [62] J.F. Rosser, G. Long, S. Zakhary, D.S. Boyd, Y. Mao, D. Robinson, Modelling urban housing stocks for building energy simulation using citygml energysade, *ISPRS Int. J. Geo-Inf.* 8 (4) (2019) 163, <http://dx.doi.org/10.3390/ijgi8040163>, URL <https://www.mdpi.com/2220-9964/8/4/163>.
- [63] D.B. Crawley, L.K. Lawrie, F.C. Winkelmann, W.F. Buhl, Y.J. Huang, C.O. Pedersen, R.K. Strand, R.J. Liesen, D.E. Fisher, M.J. Witte, J. Glazer, Energyplus: Creating a new-generation building energy simulation program, *Energy Build.* (2001) [http://dx.doi.org/10.1016/S0378-7788\(00\)00114-6](http://dx.doi.org/10.1016/S0378-7788(00)00114-6).
- [64] Doppelintegral GmbH, INSEL 8.2, Doppelintegral GmbH, Stuttgart, 2018, URL <https://www.insel.eu/en/>.
- [65] V. Weiler, J. Stave, U. Eicker, Renewable energy generation scenarios using 3D urban modeling tools - methodology for heat pump and co-generation systems with case study application, *Energies* 12 (3) (2019) 1–19, <http://dx.doi.org/10.3390/en12030403>.
- [66] S.E. Mattsson, H. Elmqvist, M. Otter, Physical system modeling with modelica, *Control Eng. Pract.* 6 (4) (1998) 501–510, [http://dx.doi.org/10.1016/S0967-0661\(98\)00047-1](http://dx.doi.org/10.1016/S0967-0661(98)00047-1).
- [67] G. Schweiger, R. Heimrath, B. Falay, K. O'Donovan, P. Nageler, R. Pertschy, G. Engel, W. Streicher, I. Leusbrock, District energy systems: Modelling paradigms and general-purpose tools, *Energy* 164 (2018) 1326–1340, <http://dx.doi.org/10.1016/j.energy.2018.08.193>, URL <https://linkinghub.elsevier.com/retrieve/pii/S0360544218317274>.
- [68] S.A. Klein, W.A. Beckman, J.A. Duffie, TRNYSYS - A transient simulation program, in: *ASHRAE Trans.*, 82, (pt 1) (ISSN: 00012505) 1976, pp. 623–633.
- [69] D. Wang, J. Landolt, G. Mavromatidis, K. Orehounig, J. Carmeliet, CESAR: A bottom-up building stock modelling tool for Switzerland to address sustainable energy transformation strategies, *Energy Build.* 169 (2018) 9–26.
- [70] C.F. Reinhart, T. Dogan, A. Jakubiec, T. Rakha, A. Sang, Umi-an urban simulation environment for building energy use, daylighting and walkability 2 3, in: *Proceedings of Building Simulation 2013*, Chambéry, France, 2013, pp. 476–483, URL https://www.researchgate.net/publication/264352980_UMI_-_An_urban_simulation_environment_for_building_energy_use_daylighting_and_walkability.
- [71] R. Guglielmetti, D. Macumber, N. Long, OpenStudio: An Open Source Integrated Analysis Platform, Tech. rep., National Renewable Energy Lab. (NREL), Golden, CO (United States), 2011.
- [72] Y. Chen, T. Hong, M.A. Piette, Automatic generation and simulation of urban building energy models based on city datasets for city-scale building retrofit analysis, *Appl. Energy* 205 (2017) 323–335, <http://dx.doi.org/10.1016/J.APENERGY.2017.07.128>, URL <https://www.sciencedirect.com/science/article/pii/S0306261917310024>.
- [73] P. Remmen, M. Lauster, M. Mans, M. Fuchs, T. Osterhage, D. Müller, TEASER: An open tool for urban energy modelling of building stocks, *J. Build. Perform. Simul.* 11 (1) (2018) 84–98, <http://dx.doi.org/10.1080/19401493.2017.1283539>.
- [74] R. Nouvel, A. Mastrucci, U. Leopold, O. Baume, V. Coors, U. Eicker, Combining GIS-based statistical and engineering urban heat consumption models: Towards a new framework for multi-scale policy support, *Energy Build.* 107 (2015) 204–212, <http://dx.doi.org/10.1016/j.enbuild.2015.08.021>.
- [75] L. Fierz, Cesar-p-v2.0.1, 2021, <http://dx.doi.org/10.5281/zenodo.5148531>.
- [76] Robert McNeel & Associates, Rhinoceros 3d, 2020, URL <https://www.rhino3d.com/>.
- [77] J.A. Jakubiec, C.F. Reinhart, DIVA 2.0: Integrating daylight and thermal simulations using rhinoceros 3D, daysim and EnergyPlus, in: *Proceedings of Building Simulation*, Vol. 20, Citeseer, 2011, pp. 2202–2209.
- [78] C. Nytsch-Geusen, J. Rädler, M. Thorade, C. Ribas Tugores, BIM2modelica - An open source toolchain for generating and simulating thermal multi-zone building models by using structured data from BIM models, in: *Proceedings of the 13th International Modelica Conference*, Regensburg, Germany, March 4–6, 2019, Vol. 157, 2019, pp. 33–38, <http://dx.doi.org/10.3384/ecp1915733>.
- [79] C. Nytsch-Geusen, A. Inderfurth, W. Kaul, K. Mucha, J. Rädler, M. Thorade, C.R. Tugores, Template based code generation of modelica building energy simulation models, in: *Proceedings of the 12th International Modelica Conference*, Prague, Czech Republic, May 15–17, 2017, Vol. 132, 2017, pp. 199–207, <http://dx.doi.org/10.3384/ecp17132199>.
- [80] D. Müller, M. Lauster, A. Constantin, M. Fuchs, P. Remmen, AixLib - An open-source modelica library within the IEA-ebc annex 60 framework, in: D.T. Universität (Ed.), *Proceedings of the CENTRAL EUROPEAN SYMPOSIUM on BUILDING PHYSICS 2016 and BauSIM 2016*, Dresden, Germany, 2016, pp. 3–11, URL <http://www.iea-annex60.org/downloads/2016-bausim-aixlib.pdf>.
- [81] M. Wetter, W. Zuo, T.S. Noudui, X. Pang, Modelica buildings library, *J. Build. Perform. Simul.* 4 (7(4):2) (2014) 253–270.
- [82] C. Nytsch-Geusen, C. Banhardt, I. Alexander, K. Mucha, J. Möckel, J. Rädler, M. Thorade, C. Tugores, Buildingsystems - eine modular hierarchische modellbibliothek zur energetischen gebäude- und anlagensimulation, in: *BAUSIM 2016 IBPSA Germany*, 2016, pp. 473–480.
- [83] F. Jorissen, G. Reynders, R. Baetens, D. Picard, D. Saelens, L. Helsen, Implementation and verification of the IDEAS building energy simulation library, *J. Build. Perform. Simul.* 11 (2018) 669–688, <http://dx.doi.org/10.1080/19401493.2018.1428361>.
- [84] M. Wetter, C. van Treeck, New Generation Computational Tools for Building & Community Energy Systems - Annex 60 Final Report, September 2017, EBC Bookshop, Birmingham, 2017, 493 Pages, URL <https://publications.rwth-aachen.de/record/699703>.
- [85] I. Hijazi, A. Donaubaue, T.H. Kolbe, BIM-GIS integration as dedicated and independent course for geoinformatics students: Merits, challenges, and ways forward, *ISPRS Int. J. Geo-Inf.* 7 (8) (2018) <http://dx.doi.org/10.3390/ijgi7080319>.
- [86] A. Geiger, J. Benner, K.H. Haefele, Generalization of 3D IFC building models, in: *3D Geoinformation Science*, Springer, 2015, pp. 19–35.
- [87] X. Liu, X. Wang, G. Wright, J.C.P. Cheng, X. Li, R. Liu, A state-of-the-art review on the integration of building information modeling (BIM) and geographic information system (GIS), *ISPRS Int. J. Geo-Inf.* 6 (2) (2017) <http://dx.doi.org/10.3390/ijgi6020053>, URL <https://www.mdpi.com/2220-9964/6/2/53>.
- [88] J. Reyna, A. Roth, A. Burr, M. Specian, How can cities use urban-scale building energy modeling? in: *Tech. Rep.*, 2018 ACEEE Summer Study on Energy Efficiency in Buildings, National Renewable Energy Lab.(NREL) Golden, CO (United States), 2018, pp. 1–11.
- [89] V. Harish, A. Kumar, A review on modeling and simulation of building energy systems, *Renew. Sustain. Energy Rev.* 56 (2016) 1272–1292, <http://dx.doi.org/10.1016/j.rser.2015.12.040>.
- [90] P. Romano, E. Prataviera, L. Carneletto, J. Vivian, M. Zinzi, A. Zarrella, Assessment of the urban heat island impact on building energy performance at district level with the eureka platform, *Climate* 9 (3) (2021) 48.
- [91] T. Hong, X. Luo, Modeling building energy performance in urban context, in: *Proceedings of the 2018 Building Performance Analysis Conference and SimBuild Co-Organized By ASHRAE and IBPSA-USA*, Chicago, IL, USA, 2018, pp. 26–28.
- [92] M. Lepore, Urban microclimate parameters for buildings energy strategies, *VITRUVIO-Int. J. Archit. Technol. Sustain.* 1 (2) (2016) 1–10.
- [93] C. Li, 2.09-GIS For urban energy analysis, in: *Earth Systems and Environmental Sciences*, Elsevier, Oxford, UK, 2018, pp. 187–195.
- [94] S.J. Quan, Q. Li, G. Augenbroe, J. Brown, P.P.-J. Yang, Urban data and building energy modeling: A GIS-based urban building energy modeling system using the urban-EPC engine, in: *Planning Support Systems and Smart Cities*, Springer, 2015, pp. 447–469.
- [95] S.J. Quan, C. Li, Urban form and building energy use: A systematic review of measures, mechanisms, and methodologies, *Renew. Sustain. Energy Rev.* 139 (2021) 110662.
- [96] H. Sanaieian, M. Tenpierik, K. Van Den Linden, F.M. Seraj, S.M.M. Shemrani, Review of the impact of urban block form on thermal performance, solar access and ventilation, *Renew. Sustain. Energy Rev.* 38 (2014) 551–560.
- [97] Y. Ko, Urban form and residential energy use: A review of design principles and research findings, *J. Plan. Lit.* 28 (4) (2013) 327–351.
- [98] J.E. Anderson, G. Wulforst, W. Lang, Energy analysis of the built environment - A review and outlook, *Renew. Sustain. Energy Rev.* 44 (2015) 149–158.
- [99] F. Yang, Z. Jiang, Urban building energy modelling and urban design for sustainable neighbourhood development-A China perspective, in: *IOP Conference Series: Earth and Environmental Science*, Vol. 329, IOP Publishing, 2019, 012016.
- [100] H. Wang, Y. Pan, X. Luo, Integration of BIM and GIS in sustainable built environment: A review and bibliometric analysis, *Autom. Constr.* 103 (2019) 41–52, <http://dx.doi.org/10.1016/j.autcon.2019.03.005>.
- [101] T.H. Kolbe, G. Gröger, L. Plümer, Citygml: Interoperable access to 3D city models, *Geo-Inf. Disaster Manag.* (2005) 883–899, http://dx.doi.org/10.1007/3-540-27468-5_63.
- [102] L. Barazzetti, F. Banfi, BIM and GIS: when parametric modeling meets geospatial data, in: *ISPRS Workshop on Geospatial Solutions for Structural Design, Construction and Maintenance in Training Civil Engineers and Architects*, Geospace 2017, Vol. 4, 2017, pp. 1–8.
- [103] P. Nageler, G. Zahrer, R. Heimrath, T. Mach, F. Mauthner, I. Leusbrock, H. Schranzhofer, C. Hochenauer, Novel validated method for GIS based automated dynamic urban building energy simulations, *Energy* 139 (2017) 142–154, <http://dx.doi.org/10.1016/j.energy.2017.07.151>.
- [104] R.H. Henninger, M.J. Witte, D.B. Crawley, Analytical and comparative testing of EnergyPlus using IEA hvac BESTEST E100–E200 test suite, *Energy Build.* 36 (8) (2004) 855–863.
- [105] R. Judkoff, J. Neymark, Model Validation and Testing: The Methodological Foundation of ASHRAE Standard 140, Tech. rep., National Renewable Energy Lab.(NREL), Golden, CO (United States), 2006.
- [106] D. Saelens, I. De Jaeger, F. Bünning, M. Mans, A. Vandermeulen, B. Van der Heide, E. Garreau, A. Maccarini, Ø. Ronneseth, I. Sartori, et al., Towards a DESTEST: A district energy simulation test developed in IBPSA project 1, in: *Proceedings of Building Simulation 2019: 16th Conference of IBPSA, IBPSA*, 2019, pp. 3569–3577.
- [107] A. Malhotra, S. Raming, J. Frisch, C. van Treeck, Citybit: Citygml building interpolation tool for energy performance simulations, in: *Proceedings of 2021 European Conference on Computing in Construction (2021 EC³)*, 2021, pp. 245–252, <http://dx.doi.org/10.35490/EC3.2021.148>.

- [108] C. Hoare, S. Pinheiro, J. O'Donnell, An application of the PROV-O vocabulary to building energy performance simulation, in: *Proceedings of the 2021 European Conference on Computing in Construction*, in: *Computing in Construction*, vol. 2, University College Dublin, Online, 2021, pp. 390–397, <http://dx.doi.org/10.35490/ec3.2021.205>.
- [109] J. Zuo, Z.-Y. Zhao, Green building research—current status and future agenda: A review, *Renew. Sustain. Energy Rev.* 30 (2014) 271–281.
- [110] J. Sousa, Energy simulation software for buildings: review and comparison, in: *International Workshop on Information Technology for Energy Applications-IT4Energy*, Lisbon, 2012, pp. 1–12.
- [111] M. Wetter, C. van Treeck, L. Helsen, A. Maccarini, D. Saelens, D. Robinson, G. Schweiger, IBPSA project 1: BIM/GIS and modelica framework for building and community energy system design and operation—ongoing developments, lessons learned and challenges, in: *IOP Conference Series: Earth and Environmental Science*, Vol. 323, IOP Publishing, 2019, 012114.
- [112] J.F. Burnham, Scopus database: A review, *Biomed. Digit. Libr.* 3 (1) (2006) 1–8.
- [113] A. Noruzi, Google scholar: The new generation of citation indexes, *Libri* 55 (2005).
- [114] N. Jan van Eck, L. Waltman, *VOSviewer Manual*, Tech. rep., Leiden University's: Centre for Science and Technology Studies (CWTS), 2018.
- [115] P. Nageler, G. Schweiger, H. Schranzhofer, T. Mach, R. Heimrath, C. Hochenauer, Novel method to simulate large-scale thermal city models, *Energy* 157 (2018) 633–646, <http://dx.doi.org/10.1016/J.ENERGY.2018.05.190>, URL <https://www.sciencedirect.com/science/article/pii/S0360544218310363>.
- [116] C. Cerezo Davila, C.F. Reinhart, J.L. Bemis, Modeling boston: A workflow for the efficient generation and maintenance of urban building energy models from existing geospatial datasets, *Energy* 117 (2016) 237–250, <http://dx.doi.org/10.1016/J.ENERGY.2016.10.057>, URL <https://www.sciencedirect.com/science/article/pii/S0360544216314918>.
- [117] A. Mastrucci, O. Baume, F. Stazi, S. Salvucci, U. Leopold, A GIS-based approach to estimate energy savings and indoor thermal comfort for urban housing stock retrofitting, in: *BauSIM2014 Conference Proceedings and Keynote Lecture Presentations*, September 22–24, 2014, RWTH Aachen University, Germany, Aachen, 2014, p. 8, URL <http://www.ibpsa.org/proceedings/bausimPapers/2014/p1136.final.pdf>.
- [118] T. Dogan, C. Reinhart, Shoboxer: An algorithm for abstracted rapid multi-zone urban building energy model generation and simulation, *Energy Build.* 140 (2017) 140–153, <http://dx.doi.org/10.1016/j.enbuild.2017.01.030>.
- [119] T. Hong, M.A. Piette, Y. Chen, S.H. Lee, S.C. Taylor-Lange, R. Zhang, K. Sun, P. Price, Commercial building energy saver: An energy retrofit analysis toolkit, *Appl. Energy* 159 (2015) 298–309, <http://dx.doi.org/10.1016/J.APENERGY.2015.09.002>, URL <https://www.sciencedirect.com/science/article/pii/S03606261915010703>.
- [120] S. Torabi Moghadam, P. Lombardi, F. Ugliotti, A. Odello, G. Mutani, BIM-GIS Modelling for sustainable urban development authors, *Newdist SPECIAL IS* (2011) (2016) 339–350.
- [121] M. Rossknecht, E. Airaksinen, Concept and evaluation of heating demand prediction based on 3D city models and the citygml energy ADE - case study helsinki, *ISPRS Int. J. Geo-Inf.* 9 (2020) 1–20, <http://dx.doi.org/10.3390/ijgi9100602>.
- [122] M. Zirak, M. Royapoor, T. Gilbert, Cross-platform energy modeling for scalable urban energy simulation : A case-study, in: *IAPE '19*, Oxford, United Kingdom, 2019, pp. 2–7.
- [123] E. Chatzinikolaou, I. Pispidiakis, E. Dimopoulou, A semantically enriched and web-based 3D energy model visualization and retrieval for smart building implementation using citygml and dynamizer ade, *ISPRS Ann. Photogramm. Remote Sens. Spatial Inf. Sci.* VI-4/W1-20 (September) (2020) 53–60, <http://dx.doi.org/10.5194/isprs-annals-vi-4-w1-2020-53-2020>.
- [124] R. Nouvel, M. Zirak, V. Coors, U. Eicker, The influence of data quality on urban heating demand modeling using 3D city models, *Comput. Environ. Urban Syst.* (2017) <http://dx.doi.org/10.1016/j.compenvurbsys.2016.12.005>.
- [125] U. Eicker, M. Zirak, N. Bartke, L. Romero Rodríguez, V. Coors, New 3D model based urban energy simulation for climate protection concepts, *Energy Build.* 163 (2018) 79–91, <http://dx.doi.org/10.1016/j.enbuild.2017.12.019>.
- [126] K.N. Streicher, P. Paday, D. Parra, M.C. Bürer, S. Schneider, M.K. Patel, Analysis of space heating demand in the swiss residential building stock: Element-based bottom-up model of archetype buildings, *Energy Build.* 184 (2019) 300–322, <http://dx.doi.org/10.1016/j.enbuild.2018.12.011>.
- [127] G. Agugiaro, Energy planning tools and citygml-based 3D virtual city models: experiences from trento (Italy), *Appl. Geomat.* 8 (1) (2016) 41–56, <http://dx.doi.org/10.1007/s12518-015-0163-2>, URL <https://link.springer.com/article/10.1007/s12518-015-0163-2>.
- [128] I. De Jaeger, G. Reyniers, D. Saelens, Quantifying uncertainty propagation for the district energy demand using realistic variations on input data, in: *Proceedings of Building Simulation 2019: 16th Conference of IBPSA*, 2020, pp. 3636–3643, <http://dx.doi.org/10.26868/25222708.2019.210923>.
- [129] G. Kazas, E. Fabrizio, M. Perino, Energy demand profile generation with detailed time resolution at an urban district scale: A reference building approach and case study, *Appl. Energy* 193 (2017) 243–262, <http://dx.doi.org/10.1016/j.apenergy.2017.01.095>.
- [130] A. Nutkiewicz, Z. Yang, R.K. Jain, Data-driven urban energy simulation (DUE-s): A framework for integrating engineering simulation and machine learning methods in a multi-scale urban energy modeling workflow, *Appl. Energy* 225 (2018) 1176–1189, <http://dx.doi.org/10.1016/j.apenergy.2018.05.023>.
- [131] R. Nouvel, M. Zirak, H. Dagtageri, V. Coors, U. Eicker, Urban energy analysis based on 3d city model for national scale applications, in: *5th German-Austrian IBPSA Conference*, 2014, pp. 83–90.
- [132] X. Li, R. Yao, W. Yu, X. Meng, M. Liu, A. Short, B. Li, Low carbon heating and cooling of residential buildings in cities in the hot summer and cold winter zone - A bottom-up engineering stock modeling approach, *J. Cleaner Prod.* 220 (2019) 271–288, <http://dx.doi.org/10.1016/j.jclepro.2019.02.023>.
- [133] C. Cerezo, J. Sokol, C. Reinhart, A. Al-Mumin, Three methods for characterizing building archetypes in urban energy simulation. A case study in Kuwait city, in: *Proceedings of BS2015: 14th Conference of International Building Performance Simulation Association*, Hyderabad, India, 2015, pp. 2873–2880.
- [134] G. Agugiaro, S. Hauer, F. Nadler, Coupling of citygml-based semantic city models with energy simulation tools: some experiences, in: *REAL CORP 2015*, 2015, pp. 191–200.
- [135] J.A. Fonseca, T.A. Nguyen, A. Schlueter, F. Marechal, City energy analyst (CEA): Integrated framework for analysis and optimization of building energy systems in neighborhoods and city districts, *Energy Build.* 113 (2016) 202–226, <http://dx.doi.org/10.1016/j.enbuild.2015.11.055>.
- [136] K.N. Streicher, P. Paday, D. Parra, M.C. Bürer, M.K. Patel, Assessment of the current thermal performance level of the swiss residential building stock: Statistical analysis of energy performance certificates, *Energy Build.* 178 (2018) 360–378, <http://dx.doi.org/10.1016/j.enbuild.2018.08.032>.
- [137] S. Nagpal, C.F. Reinhart, A comparison of two modeling approaches for establishing and implementing energy use reduction targets for a university campus, *Energy Build.* 173 (2018) 103–116, <http://dx.doi.org/10.1016/j.enbuild.2018.05.035>.
- [138] B. Coffey, A. Stone, P. Ruyssevelt, P. Haves, An epidemiological approach to simulation-based analysis of large building stocks, in: *14th International Conference of IBPSA - Building Simulation 2015*, BS 2015, Conference Proceedings, 2015, pp. 1916–1923.
- [139] R. Braun, V. Weiler, M. Zirak, L. Dobisch, V. Coors, U. Eicker, Using 3D cityGML models for building simulation applications at district level, in: *2018 IEEE International Conference on Engineering, Technology and Innovation, ICE/ITMC 2018 - Proceedings*, Institute of Electrical and Electronics Engineers Inc., 2018, pp. 1–8, <http://dx.doi.org/10.1109/ICE.2018.8436355>.
- [140] P. Murray, K. Orehounig, D. Grosspietsch, J. Carmeliet, A comparison of storage systems in neighbourhood decentralized energy system applications from 2015 to 2050, *Appl. Energy* 231 (2018) 1285–1306, <http://dx.doi.org/10.1016/j.apenergy.2018.08.106>.
- [141] J. Sokol, C. Cerezo Davila, C.F. Reinhart, Validation of a Bayesian-based method for defining residential archetypes in urban building energy models, *Energy Build.* 134 (2017) 11–24, <http://dx.doi.org/10.1016/j.enbuild.2016.10.050>.
- [142] D. Monien, A. Strzalka, A. Koukafikis, V. Coors, U. Eicker, Comparison of building modelling assumptions and methods for urban scale heat demand forecasting, *Future Cities Environ.* 3 (2017) 2, <http://dx.doi.org/10.1186/s40984-017-0025-7>, URL <https://futurecitiesandenvironment.com/article/10.1186/s40984-017-0025-7/>.
- [143] U. Eicker, V. Weiler, J. Schumacher, R. Braun, On the design of an urban data and modeling platform and its application to urban district analyses, *Energy Build.* 217 (2020) 109954, <http://dx.doi.org/10.1016/j.enbuild.2020.109954>.
- [144] W. Wu, B. Dong, Q.R. Wang, M. Kong, D. Yan, J. An, Y. Liu, A novel mobility-based approach to derive urban-scale building occupant profiles and analyze impacts on building energy consumption, *Appl. Energy* 278 (2020) 115656, <http://dx.doi.org/10.1016/j.apenergy.2020.115656>.
- [145] A. Zarrella, E. Pratavera, P. Romano, L. Carnieletto, J. Vivian, Analysis and application of a lumped-capacitance model for urban building energy modelling, *Sustainable Cities Soc.* 63 (2020) 102450, <http://dx.doi.org/10.1016/j.scs.2020.102450>.
- [146] Z. Zheng, J. Chen, X. Luo, Parallel computational building-chain model for rapid urban-scale energy simulation, *Energy Build.* 201 (2019) 37–52, <http://dx.doi.org/10.1016/j.enbuild.2019.07.034>.
- [147] D. Meha, T. Novosel, N. Duić, Bottom-up and top-down heat demand mapping methods for small municipalities, case glogoc, *Energy* 199 (2020) 117429, <http://dx.doi.org/10.1016/j.energy.2020.117429>.
- [148] A. Behravan, R. Obermaier, A. Nasari, Thermal dynamic modeling and simulation of a heating system for a multi-zone office building equipped with demand controlled ventilation using MATLAB/simulink, in: *2017 International Conference on Circuits, System and Simulation, ICCSS 2017*, 2017, pp. 103–108, <http://dx.doi.org/10.1109/CIRSSYSIM.2017.8023191>.
- [149] O. Guerra-Santin, S. Silvester, Development of dutch occupancy and heating profiles for building simulation, *Build. Res. Inf.* 45 (4) (2017) 396–413, <http://dx.doi.org/10.1080/09613218.2016.1160563>.
- [150] P. Turcsanyi, Heating demand - simulation and calculation, *IOP Conf. Ser.: Mater. Sci. Eng.* 566 (1) (2019) <http://dx.doi.org/10.1088/1757-899X/566/1/012035>.

- [151] S. Eikemeier, R. Wimmer, A. Mahdavi, Life-cycle oriented simulation-supported heating demand optimisation of buildings: An Austrian case study, *IOP Conf. Ser.: Earth Environ. Sci.* 410 (1) (2020) <http://dx.doi.org/10.1088/1755-1315/410/1/012027>.
- [152] J. Rucińska, A. Trzaski, Measurements and simulation study of daylight availability and its impact on the heating, cooling and lighting energy demand in an educational building, *Energies* 13 (10) (2020) <http://dx.doi.org/10.3390/en13102555>.
- [153] P. Turcsányi, A. Sedláková, Assessment of two different methods of calculating a heating demand, *Sel. Sci. Pap. - J. Civ. Eng.* 14 (2) (2020) 51–60, <http://dx.doi.org/10.1515/ssjce-2019-0017>.
- [154] P. Würstle, T. Santhanavanich, R. Padsala, V. Coors, The conception of an urban energy dashboard using 3D city models, in: *E-Energy 2020 - Proceedings of the 11th ACM International Conference on Future Energy Systems*, Machinery Association for Computing NY, 2020, pp. 523–527, <http://dx.doi.org/10.1145/3396851.3402650>, URL <https://dl.acm.org/doi/10.1145/3396851.3402650>.
- [155] M. Österbring, E. Mata, L. Thuvander, H. Wallbaum, Explorative life-cycle assessment of renovating existing urban housing-stocks, *Build. Environ.* 165 (2019) <http://dx.doi.org/10.1016/j.buildenv.2019.106391>.
- [156] A. Mastrucci, A. Marvuglia, E. Benetto, U. Leopold, A spatio-temporal life cycle assessment framework for building renovation scenarios at the urban scale, *Renew. Sustain. Energy Rev.* 126 (2020) <http://dx.doi.org/10.1016/j.rser.2020.109834>.
- [157] T. Csoknyai, S. Hrabovszky-Horváth, Z. Georgiev, M. Jovanovic-Popovic, B. Stankovic, O. Villatoro, G. Szendrő, Building stock characteristics and energy performance of residential buildings in eastern-European countries, *Energy Build.* 132 (2016) 39–52, <http://dx.doi.org/10.1016/j.enbuild.2016.06.062>.
- [158] N. Diefenbach, T. Loga, B. Stein, Reaching the climate protection targets for the heat supply of the german residential building stock: How and how fast? *Energy Build.* 132 (2016) 53–73, <http://dx.doi.org/10.1016/j.enbuild.2016.06.095>.
- [159] Q. Li, S. Jige Quan, G. Augenbroe, P. Pei-Ju Yang, J. Brown, Building energy modelling at urban scale: Integration of reduced order energy model with geographical information, in: *14th Conference of International Building Performance Simulation Association*, Hyderabad, India, Dec. 7–9, 2015, 2015, pp. 190–198.
- [160] I. Ballarini, V. Corrado, A new methodology for assessing the energy consumption of building stocks, *Energies* 10 (8) (2017) <http://dx.doi.org/10.3390/en10081102>.
- [161] G. Mutani, C. Delmastro, M. Gargiulo, S.P. Corgnati, Characterization of building thermal energy consumption at the urban scale, in: *Energy Procedia*, Vol. 101, Elsevier Ltd, 2016, pp. 384–391, <http://dx.doi.org/10.1016/j.egypro.2016.11.049>.
- [162] M. Fuchs, J. Teichmann, M. Lauster, P. Remmen, R. Streblow, D. Müller, Workflow automation for combined modeling of buildings and district energy systems, *Energy* 117 (2016) 478–484, <http://dx.doi.org/10.1016/j.energy.2016.04.023>.
- [163] R. Kaden, T.H. Kolbe, Simulation-based total energy demand estimation of buildings using semantic 3D city models, *Int. J. 3-D Inf. Model.* 3 (2) (2014) 35–53, <http://dx.doi.org/10.4018/ij3dim.2014040103>.
- [164] P. Zhu, D. Yan, H. Sun, J. An, Y. Huang, Building blocks energy estimation (BBEE): A method for building energy estimation on district level, *Energy Build.* 185 (2019) 137–147, <http://dx.doi.org/10.1016/j.enbuild.2018.12.031>.
- [165] S.M. Murshed, S. Picard, A. Koch, Citybent: an open source implementation and validation of monthly heating and cooling energy needs for 3d buildings in cities, *ISPRS Ann. Photogramm. Remote Sens. Spatial Inf. Sci.* 4 (4W5) (2017) 83–90, <http://dx.doi.org/10.5194/isprs-annals-IV-4-W5-83-2017>.
- [166] E. Mata, A. Sasic Kalagasidis, F. Johnsson, Building-stock aggregation through archetype buildings: France, Germany, Spain and the UK, *Build. Environ.* 81 (2014) 270–282, <http://dx.doi.org/10.1016/j.buildenv.2014.06.013>.
- [167] G. Dall'O', A. Galante, M. Torri, A methodology for the energy performance classification of residential building stock on an urban scale, *Energy Build.* 48 (2012) 211–219, <http://dx.doi.org/10.1016/j.enbuild.2012.01.034>, URL <https://linkinghub.elsevier.com/retrieve/pii/S0378778812000515>.
- [168] S. Evans, R. Liddiard, P. Steadman, 3DStock: A new kind of three-dimensional model of the building stock of England and Wales, for use in energy analysis, *Environ. Plan. B: Urban Anal. City Sci.* 44 (2) (2017) 227–255, <http://dx.doi.org/10.1177/0265813516652898>, URL <http://journals.sagepub.com/doi/10.1177/0265813516652898>.
- [169] Z. Yang, J. Roth, R.K. Jain, DUE-B: Data-driven urban energy benchmarking of buildings using recursive partitioning and stochastic frontier analysis, *Energy Build.* 163 (2018) 58–69, <http://dx.doi.org/10.1016/j.enbuild.2017.12.040>.
- [170] K.N. Streicher, M. Berger, J. Chambers, S. Schneider, M.K. Patel, Combined geospatial and techno-economic analysis of deep building envelope retrofit, *J. Phys. Conf. Ser.* 1343 (2019) 012028, <http://dx.doi.org/10.1088/1742-6596/1343/1/012028>, URL <https://iopscience.iop.org/article/10.1088/1742-6596/1343/1/012028>.
- [171] E. Barbour, C.C. Davila, S. Gupta, C. Reinhart, J. Kaur, M.C. González, Planning for sustainable cities by estimating building occupancy with mobile phones, *Nature Commun.* 10 (1) (2019) <http://dx.doi.org/10.1038/s41467-019-11685-w>.
- [172] L. Frayssinet, T. Berthou, B. Duplessis, F. Kuznik, J.-I. Hubert, J.-j. Roux, U. Claude, B. Lyon, C. Umr, L. Orvanne, Incertitude de simulation à l'échelle du quartier : comparaison de deux modèles et analyse de sensibilité, *Conf. IBPSA France Bordeaux* (2018) 1–8, URL <https://hal.archives-ouvertes.fr/hal-01842414/document>.
- [173] L. Frayssinet, F. Kuznik, J.L. Hubert, M. Milliez, J.J. Roux, Adaptation of building envelope models for energy simulation at district scale, *Energy Procedia* 122 (2017) 307–312, <http://dx.doi.org/10.1016/j.egypro.2017.07.327>.
- [174] K. Allacker, V. Castellani, G. Baldinelli, F. Bianchi, C. Baldassarri, S. Sala, Energy simulation and LCA for macro-scale analysis of eco-innovations in the housing stock, *Int. J. Life Cycle Assess.* 24 (6) (2019) 989–1008, <http://dx.doi.org/10.1007/s11367-018-1548-3>.
- [175] R.E.A.k. Hedegaard, M.H. Kristensen, T.H. Pedersen, A. Brun, S. Petersen, Bottom-up modelling methodology for urban-scale analysis of residential space heating demand response, *Appl. Energy* 242 (2019) 181–204, <http://dx.doi.org/10.1016/j.apenergy.2019.03.063>.
- [176] V. Ciancio, S. Falasca, I. Golasi, G. Curci, M. Coppi, F. Salata, Influence of input climatic data on simulations of annual energy needs of a building: Energyplus and WRF modeling for a case study in rome (Italy), *Energies* 11 (10) (2018) <http://dx.doi.org/10.3390/en11102835>.
- [177] E.H.M. Muñoz, I. Dochev, H. Seller, I. Peters, Constructing a synthetic city for estimating spatially disaggregated heat demand, *Int. J. Microsimulation* 9 (3) (2016) 66–88, URL <https://ideas.repec.org/a/ijm/journal/v9y2016i3p66-88.html>.
- [178] A. Malhotra, J. Frisch, C. van Treeck, Technical report: literature review concerning ifc, gbxml and citygml data models for energy performance simulation, *Universitätsbibliothek der RWTH Aachen*, 2019, <http://dx.doi.org/10.18154/RWTH-2019-08837>.
- [179] M. Laakso, A. Kiviniemi, et al., The IFC standard: A review of history, development, and standardization, *information technology, ITcon* 17 (9) (2012) 134–161.
- [180] F. Biljecki, J. Lim, J. Crawford, D. Moraru, H. Tauscher, A. Konde, K. Adouane, S. Lawrence, P. Janssen, R. Stoffus, Extending cityGML for IFC-sourced 3D city models, *Autom. Constr.* 121 (2021) 103440.
- [181] V. Dilan, Building a GIS database of protected areas in the Republic of moldova based on INSPIRE data specification on protected sites, in: *Present Environment and Sustainable Development*, 2020, p. 72.
- [182] P. Mooney, M. Minghini, et al., *A Review of Openstreetmap Data*, Ubiquity Press, 2017.
- [183] Y. Tian, Q. Zhou, X. Fu, An analysis of the evolution, completeness and spatial patterns of OpenStreetMap building data in China, *ISPRS Int. J. Geo-Inf.* 8 (1) (2019) 35.
- [184] T. Mochales, T.G. Blenkinsop, Representation of paleomagnetic data in virtual globes: A case study from the pyrenees, *Comput. Geosci.* 70 (2014) 56–62.
- [185] F. Rinker, L. Waltersdorfer, M. Schüller, S. Biff, D. Winkler, A multi-model reviewing approach for production systems engineering models, in: *International Conference on Model-Driven Engineering and Software Development*, Springer, 2020, pp. 121–146.
- [186] R. Otero, E. Frías, S. Lagüela, P. Arias, Automatic gbXML modeling from LiDAR data for energy studies, *Remote Sens.* 12 (17) (2020) 2679.
- [187] C. Yuan, F. Yunchang, Research on data standard of green building information model based on IFC & gbXML & its application, *J. Inf. Technol. Civ. Eng. Archit.* 10 (1) (2018) 9–15.
- [188] I. Gaetani, P.-J. Hoes, J. Hensen, Occupant behavior in building energy simulation: Towards a fit-for-purpose modeling strategy, *Energy Build.* 121 (2016) <http://dx.doi.org/10.1016/j.enbuild.2016.03.038>.
- [189] MathWorks, Simulink - simulation and model-based design, 2021, URL <https://uk.mathworks.com/products/simulink.html>.
- [190] ISO, ISO 52016-1:2017, Energy Performance of Buildings - Energy Needs for Heating and Cooling, Internal Temperatures and Sensible and Latent Heat Load - Part 1: Calculation Procedures, Tech. rep., International Organization of Standards, 2017.
- [191] A. Geiger, J. Benner, K.-H. Häfele, V. Hagenmeyer, Building energy simulations at urban scale based on standardized data models using a transparent enrichment process, in: *Proceedings of Building Simulation 2019: 16th Conference of IBPSA*, Vol. 16, 2020, pp. 3202–3208, <http://dx.doi.org/10.26868/25222708.2019.210250>.
- [192] L. Carnieletto, M. Ferrando, L. Teso, K. Sun, W. Zhang, F. Causone, P. Romagnoni, A. Zarrella, T. Hong, Italian prototype building models for urban scale building performance simulation, *Build. Environ.* 192 (2021) 107590.
- [193] U. Ali, M.H. Shamsi, M. Bohacek, K. Purcell, C. Hoare, E. Mangina, J. O'Donnell, A data-driven approach for multi-scale GIS-based building energy modeling for analysis, planning and support decision making, *Appl. Energy* 279 (2020) 115834.
- [194] B.T. Essawy, J.L. Goodall, D. Voce, M.M. Morsy, J.M. Sadler, Y.D. Choi, D.G. Tarboton, T. Malik, A taxonomy for reproducible and replicable research in environmental modelling, *Environ. Model. Softw.* 134 (2020) 104753.
- [195] F. Fidler, J. Wilcox, Reproducibility of scientific results, 2018.